
Components
RUNDFLEX Circular Wall Formwork



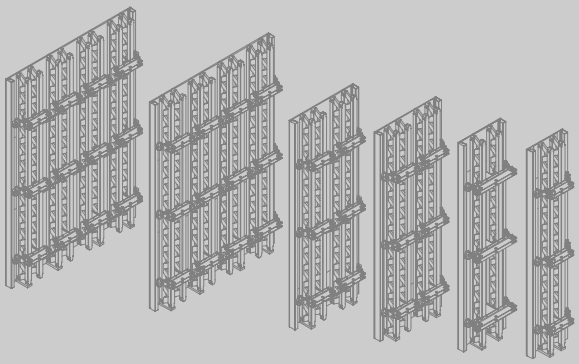

Edition 05 | 2016

Item no.	Weight kg	
		Outside Panels A 250
021800	127.000	**Outside Panel A 250 x 60**
021820	176.000	**Outside Panel A 250 x 120**
102856	231.000	**Outside Panel A 250 x 120 2R**
126073	292.000	**Outside Panel A 250 x 180**
021840	342.000	**Outside Panel A 250 x 240**
021400	422.000	**Outside Panel A 250 x 300**
021880	513.000	**Outside Panel A 250 x 360**


Ready-to-use formwork panel for circular structures.


Note

Element without distribution waler.
Panel A 250 x 60 and A 250 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 4.0 m. Plywood 21 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.

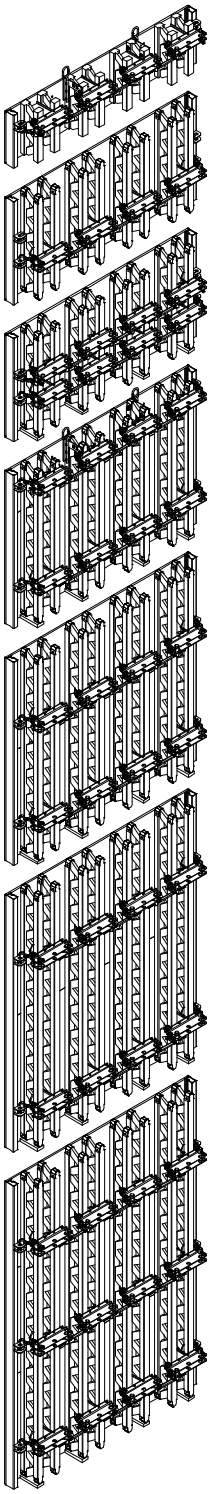

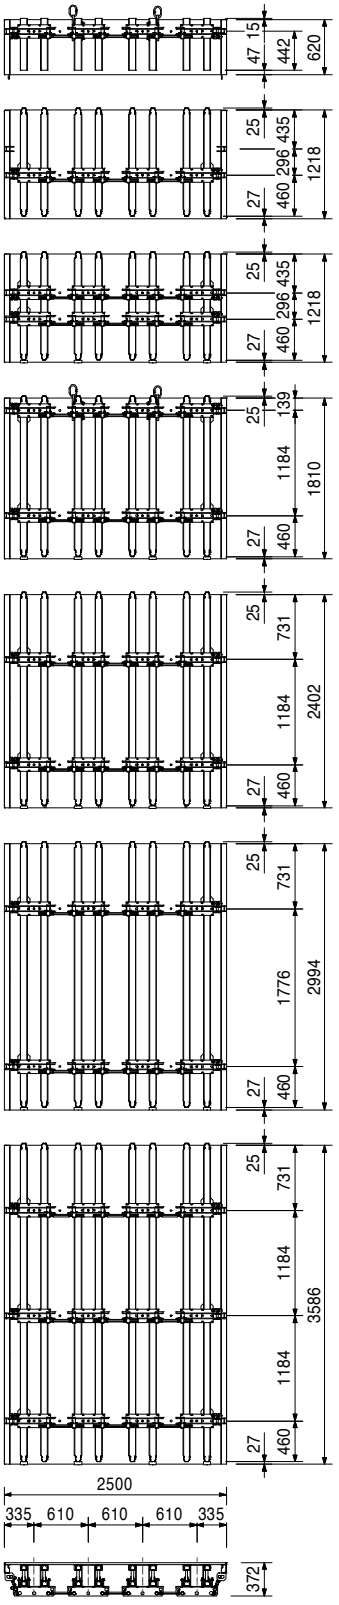

RUNDFLEX Circular Formwork

Item no.	Weight kg	
		Inside Panels l 240
021810	124.000	**Inside Panel l 240 x 60**
021830	169.000	**Inside Panel l 240 x 120**
102855	219.000	**Inside Panel l 240 x 120 2R**
126043	283.000	**Inside Panel l 240 x 180**
021850	335.000	**Inside Panel l 240 x 240**
021410	408.000	**Inside Panel l 240 x 300**
021890	499.000	**Inside Panel l 240 x 360**


Ready-to-use formwork panel for circular structures.


Note

Element without distribution waler.
Panel l 240 x 60 and l 240 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 4.0 m. Plywood 21 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.

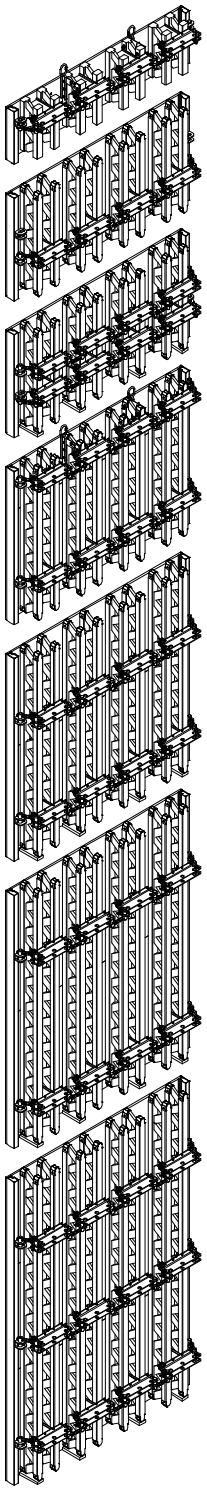

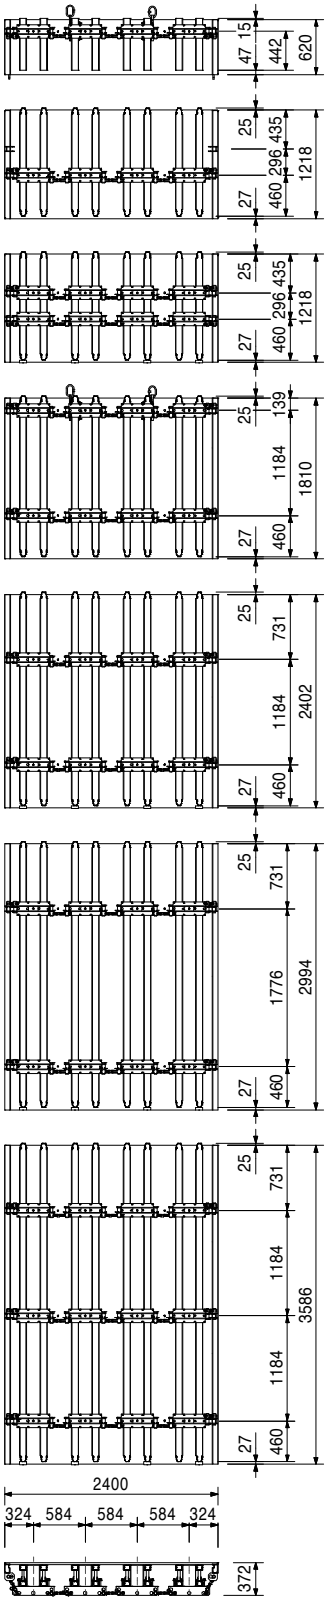

Item no.	Weight kg	
		Outside Panels A 128
021900	72.500	**Outside Panel A 128 x 60**
021920	99.000	**Outside Panel A 128 x 120**
102854	128.000	**Outside Panel A 128 x 120 2R**
126075	167.000	**Outside Panel A 128 x 180**
021940	194.000	**Outside Panel A 128 x 240**
021420	243.000	**Outside Panel A 128 x 300**
021960	289.000	**Outside Panel A 128 x 360**


Ready-to-use formwork panel for circular structures.

Note

Element without distribution waler.
Panel A 128 x 60 und A 128 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 2.5 m. Plywood 18 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.

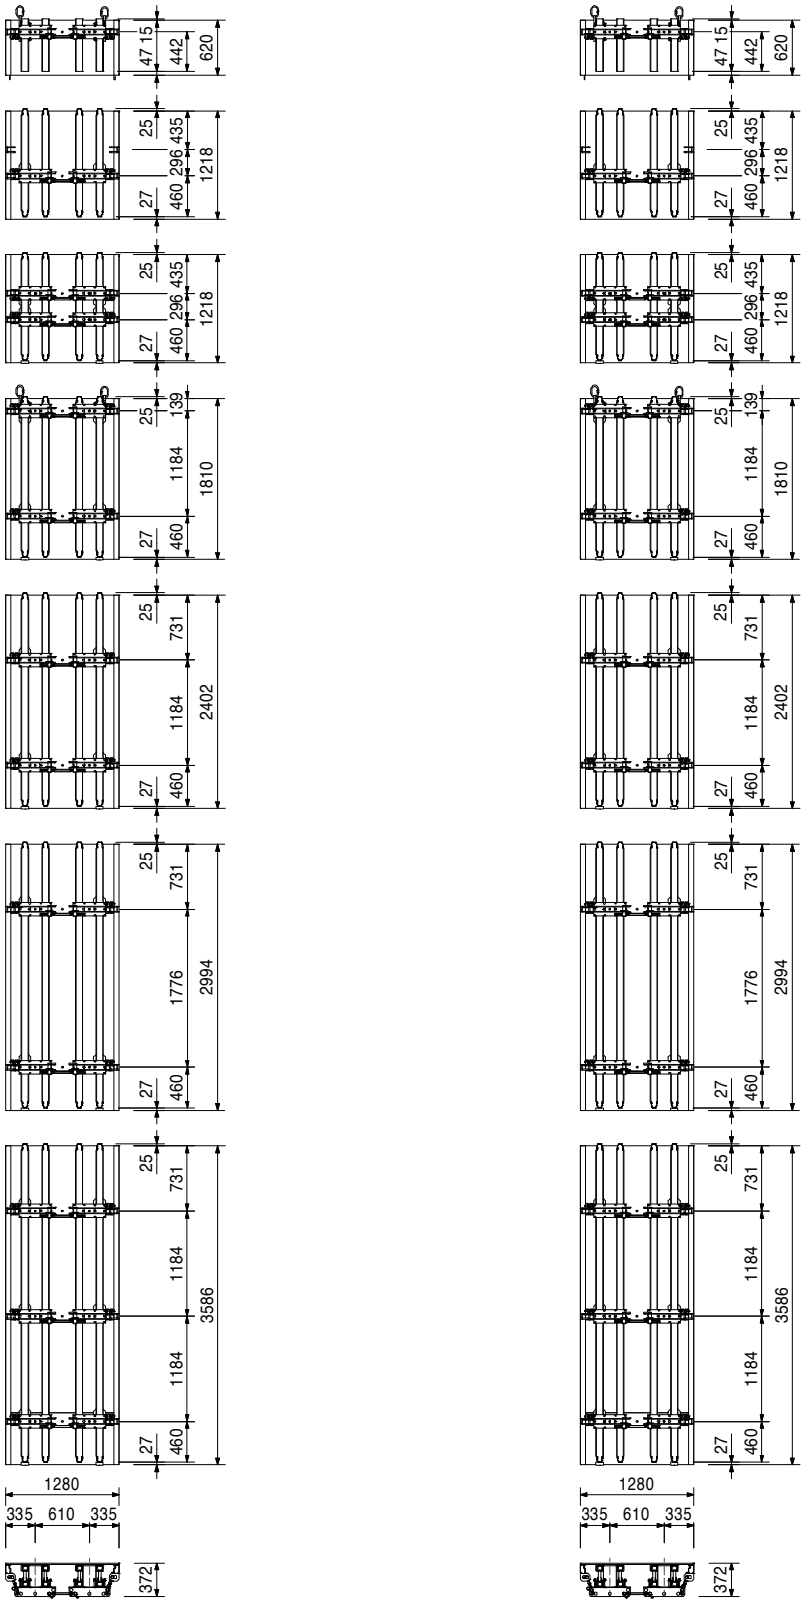

Item no.	Weight kg	
		Inside Panels I 123
021910	71.200	**Inside Panel I 123 x 60**
021930	95.300	**Inside Panel I 123 x 120**
102853	122.000	**Inside Panel I 123 x 120 2R**
126067	160.000	**Inside Panel I 123 x 180**
021950	186.000	**Inside Panel I 123 x 240**
021430	235.000	**Inside Panel I 123 x 300**
021970	275.000	**Inside Panel I 123 x 360**


Ready-to-use formwork panel for circular structures.


Note

Element without distribution waler.
Panel I 123 x 60 and I 123 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 2.5 m. Plywood 18 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.



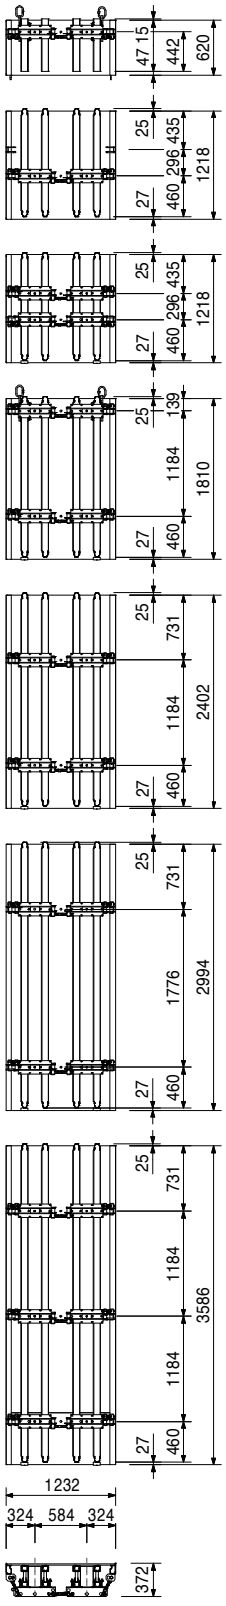

Item no.	Weight kg	
		Outside Panels A 85
020820	91.300	**Outside Panel A 85 x 120**
126079	120.000	**Outside Panel A 85 x 180**
020840	136.000	**Outside Panel A 85 x 240**
020860	175.000	**Outside Panel A 85 x 300**
020880	203.000	**Outside Panel A 85 x 360**


Ready-to-use formwork panel for circular structures.


Note

Element without distribution waler.
Panel A 85 x 180 complete with crane eye on the left and on the right side.

Technical Data

Minimum radius 1.0 m. Plywood 2 x 9 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.



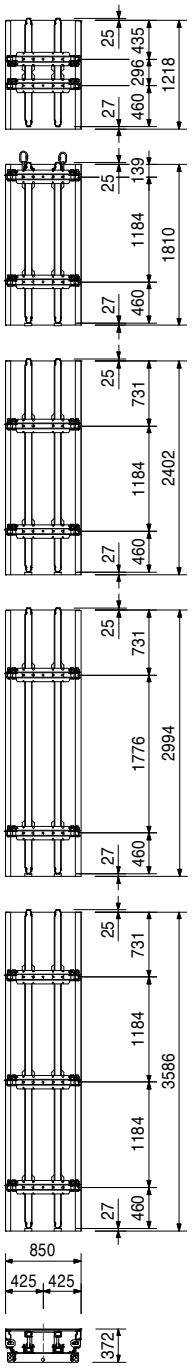

Item no.	Weight kg	
		Inside Panels I 72
020830	74.300	**Inside Panel I 72 x 120**
126070	101.000	**Inside Panel I 72 x 180**
020850	116.000	**Inside Panel I 72 x 240**
020870	153.000	**Inside Panel I 72 x 300**
020890	173.000	**Inside Panel I 72 x 360**


Ready-to-use formwork panel for circular structures.


Note

Element without distribution waler.
Panel I 72 x 180 complete with crane eye on the left and on the right side.


Technical Data


Minimum radius 1.0 m. Plywood 2 x 9 mm.
Permissible load-bearing point capacity 700 kg with crane sling angle ≤ 15°.



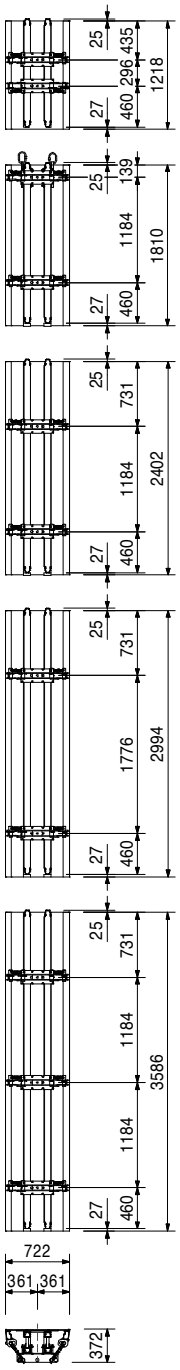



Item no.	Weight kg		
023500	4.580	**Alignment Coupler BFD, galv.** For all panel connections for MAXIMO, TRIO and RUNDFLEX. Fillers up to 10 cm.	**Technical Data** Permissible tension force 20.0 kN.



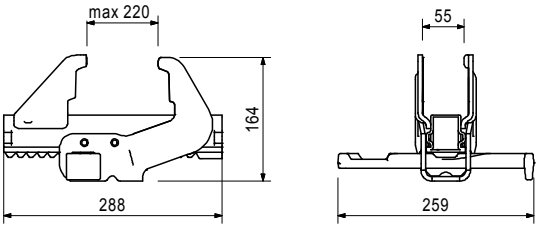



023940	6.080	**Alignment Coupler 38, galv.** For element connections with RUNDFLEX.	**Note** Compensation up to 26 cm. **Technical Data** Permissible tension force 20.0 kN.



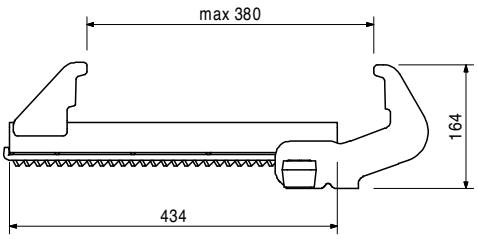



021620	3.770	**Adjusting Spindle 500, galv.** For aligning RUNDFLEX external elements. For panel joints of external and internal elements.	**Complete with** 2 pc. 022230 Cotter Pin 5/1, galv. **Note** With self-cleaning hexagonal thread.



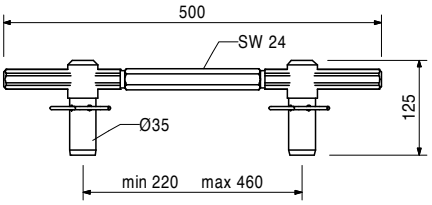



021610	2.830	**Adjusting Spindle 210, galv.** For aligning RUNDFLEX internal elements and the edge profiles on external and internal elements.	**Complete with** 2 pc. 022230 Cotter Pin 5/1, galv. **Note** With self-cleaning hexagonal thread.






Item no.	Weight kg	
021630	18.300	**Distribution Waler** For transferring anchor forces on two adjacently positioned T-walers.









Accessories

021640	1.260	**Waler Bolt for RUNDFLEX, galv.**


021640	1.260	**Waler Bolt for RUNDFLEX, galv.** For fixing the distribution waler on the T-Waler.	**Complete with** 1 pc. 022230 Cotter Pin 5/1, galv.







024480	7.040	**Extension Splice 24-2** For extending GT 24 girders and VARIO GT 24 panels up to max. height of 8.00 m.	**Complete with** 2 pc. 030190 Three Wingnut DW 15, galv. **Note** Permissible load: see PERI Design Tables.



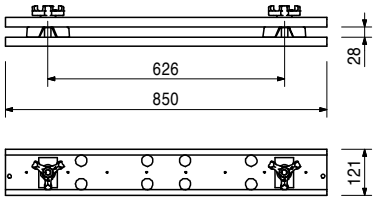



Item no.	Weight kg		
070760	4.650	**Crane Splice GT 24** For transporting elements by crane with the GT 24 girder.	**Complete with** 1 pc. 018050 Pin Ø 16 x 65/86, galv. 2 pc. 018060 Cotter Pin 4/1, galv. **Note** Follow Instructions for Use! **Technical Data** Permissible load-bearing capacity 700 kg with crane sling angle ≤ 15°.







		Crane Eyes 24	**Complete with**
021990	2.780	**Crane Eye 24, right**	4 pc. 710138 Bolt ISO 4014 M10 x 110-8.8, galv.
021980	2.780	**Crane Eye 24, left**	4 pc. 780356 Nut ISO 7042 M10-8, galv.
		For transporting elements by crane with the GT 24 girder. Mounted securely to the element.	4 pc. 710139 Washer R11 DIN 440, galv. **Note** Illustration shows Crane Eye 24, left. Follow Instructions for Use! **Technical Data** Permissible load-bearing capacity 700 kg with crane sling angle ≤ 15°.



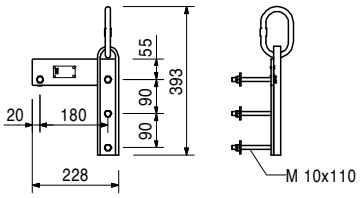



027110	11.000	**Scaffold Bracket GB 80** For assembly of a working and concreting scaffold with GT 24 girder.	**Technical Data** Permissible load 150 kg/m². Maximum width of influence 1.25 m.

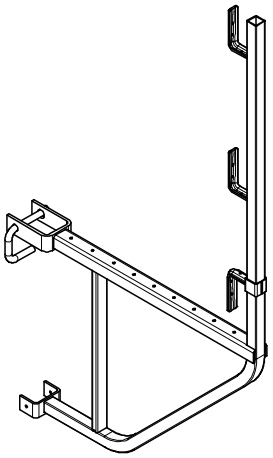

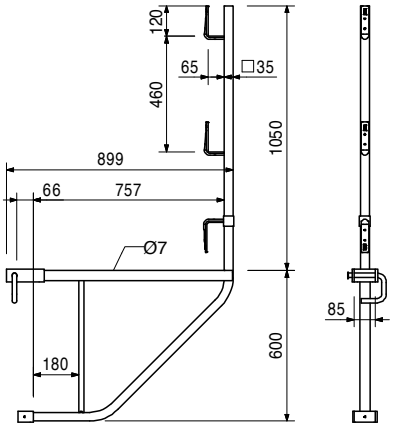

Item no.	Weight kg		
112159	2.120	**Handrail Post Holder VARIO** For assembling a guardrail with GT 24 Girder.	**Complete with** 1 pc. 024250 Wedge K, galv. 1 pc. 780800 Sleeve ISO 8752 8 x 20, galv. **Technical Data** Maximum width of influence 2.00 m.






Accessories


116292	4.730	**Guardrail Post HSGP-2**

116292	4.730	**Guardrail Post HSGP-2** As guardrail for different systems.	







021790	1.000	**Ratchet Spanner SW 24 "Combi"** For adjusting RUNDFLEX Panels and Cantilevered Parapet Platform GKB.	**Note** Length approx. 500 mm.




099540 098217	0.000 0.000	**Templates for RUNDFLEX** **Template for RUNDFLEX A 250, I 240, A 128, I 123** **Template for RUNDFLEX A 85, I 72** The template is used for external and internal elements.	**Note** Including material (formlining). Produced in accordance with project requirements.





Item no.	Weight kg		
109411	6.450	**Ladder Connector RFP** For connecting ladders at RUNDFLEX Plus panels.	**Complete with** 2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 2 pc. 701763 Clamping Plate Fl 25 x 10 x 90







051410	11.700	**Ladder 180/6, galv.** As access for PERI formwork systems.	**Complete with** 4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv. 4 pc. 710381 Nut ISO 7042 M12-8, galv.

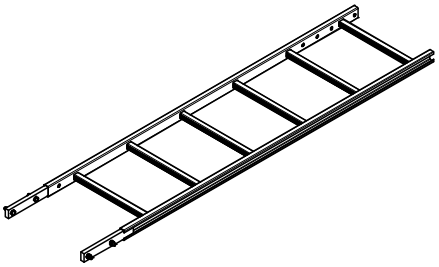

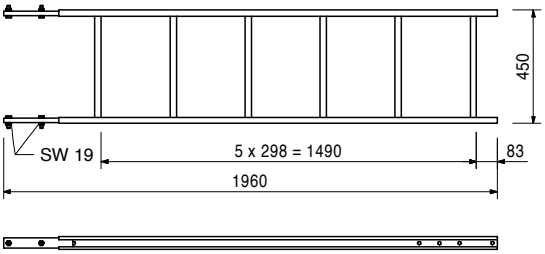


051460	2.180	**Ladder Base, galv.** As bottom ladder connection and for securing ladders against sliding on the scaffold decks.	







103718	0.684	**Ladder Hook, galv.** For adjusting the bottom ladder. Always use in pairs.	**Complete with** 2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 2 pc. 710381 Nut ISO 7042 M12-8, galv.







Item no.	Weight kg		
		Ladder Safety Cages, galv.	**Complete with**
104132	15.600	**Ladder Safety Cage 75, galv.**	4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
051450	25.200	**Ladder Safety Cage 150, galv.**	4 pc. 701763 Clamping Plate Fl 25 x 10 x 90
		Ladder safety cage for PERI access ladders.	



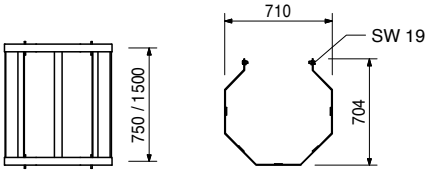



109420	27.000	**Ladder Safety Cage RFP 200**	**Complete with**
		Ladder safety cage for access ladders with exit on the side.	4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 4 pc. 701763 Clamping Plate Fl 25 x 10 x 90



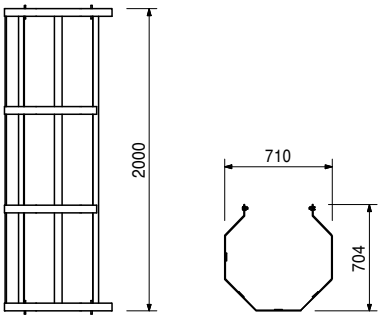



028050	4.550	**Girder Headpiece GT 24, galv.**	**Complete with**
		For connecting push-pull props and kicker braces to GT 24 Girders	1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv.



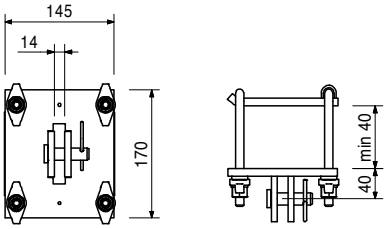



028070	4.680	**Girder Headpiece GT 24/A, galv.**	**Complete with**
		For connecting push-pull props and kicker braces to extended GT 24 Girders in the area of the Extension Splice 24-2.	1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv.



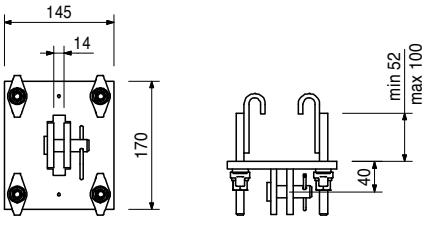

Item no.	Weight kg		
028060	1.940	**Wedge Headpiece SRZ/SRU** For connecting push-pull props and kicker braces to Steel Waler SRZ and SRU Profile U100 – U140.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv.



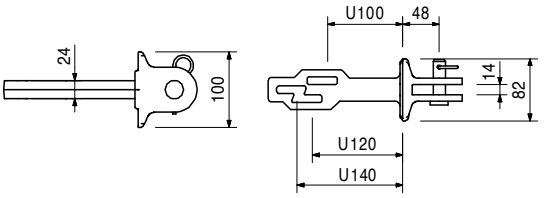


Accessories


024250	0.331	**Wedge K, galv.**


024250	0.331	**Wedge K, galv.** For coupling Compression Plate KDP, Wedge Head Piece SRZ/SRU and Waler Connector SB-A, B, C.	







117466	10.600	**Push-Pull Prop RS 210, galv.** Extension length l = 1.30 – 2.10 m. For aligning PERI formwork systems and precast concrete elements.	**Note** Permissible load see PERI Design Tables.



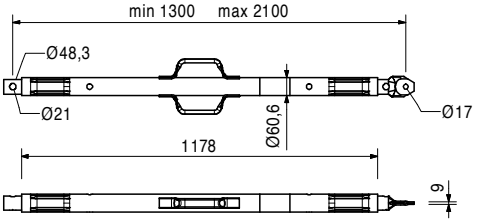



118238	12.200	**Push-Pull Prop RS 260, galv.** Extension length l = 2.30 – 2.60 m. For aligning PERI formwork systems and precast concrete elements.	**Note** Permissible load see PERI Design Tables.



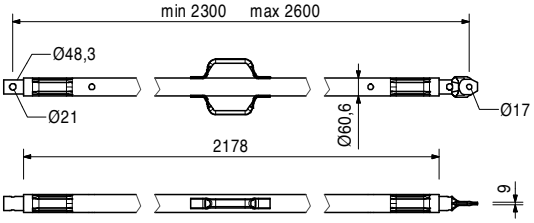



Item no.	Weight kg		
117467	15.500	**Push-Pull Prop RS 300, galv.** Extension length l = 1.90 – 3.00 m. For aligning PERI formwork systems and precast concrete elements.	**Note** Permissible load see PERI Design Tables.



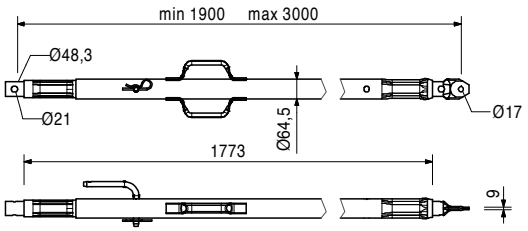



117468	23.000	**Push-Pull Prop RS 450, galv.** Extension length l = 2.80 – 4.50 m. For aligning PERI formwork systems and precast concrete elements.	**Note** Permissible load see PERI Design Tables.



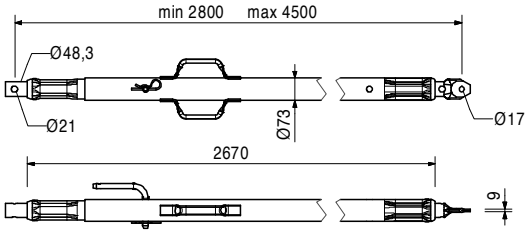



117469	40.000	**Push-Pull Prop RS 650, galv.** Extension length l = 4.30 – 6.50 m. For aligning PERI formwork systems and precast concrete elements.	**Note** Permissible load see PERI Design Tables.

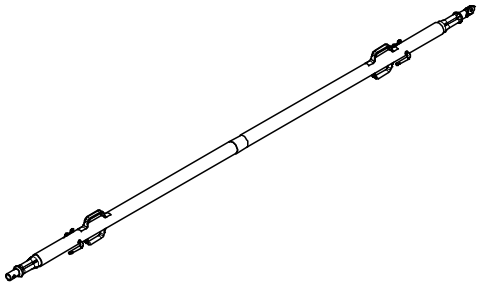

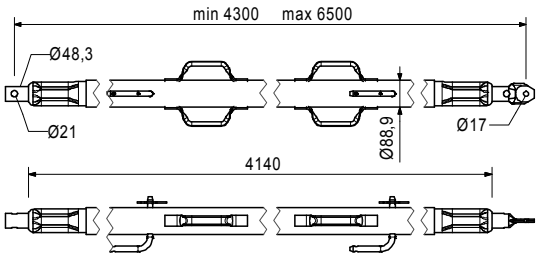



028990	115.000	**Push-Pull Prop RS 1000, galv.** Extension length l = 6.40 – 10.00 m. For aligning PERI formwork systems.	**Note** Permissible load see PERI Design Tables.

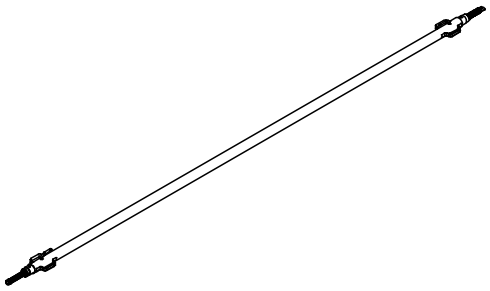

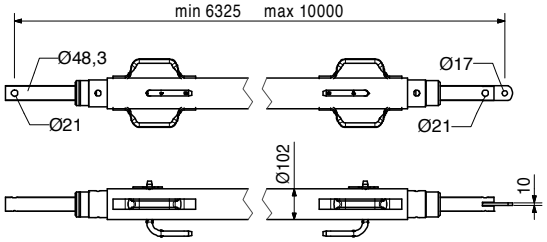



Item no.	Weight kg		
103800	271.000	**Push-Pull Prop RS 1400, galv.** Extension length l = 6.40 – 14.00 m. For aligning PERI formwork systems.	**Note** Permissible load see PERI Design Tables. Chain can be operated from bottom.

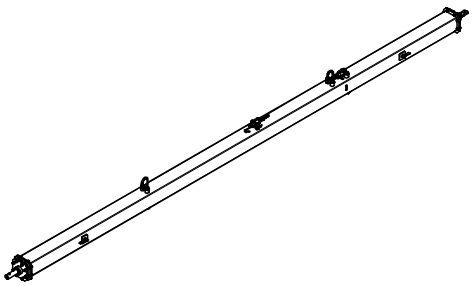

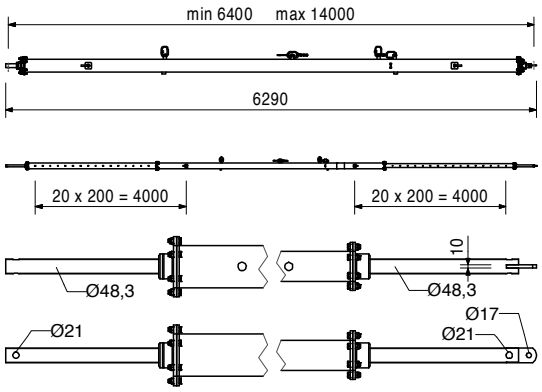

117343	3.250	**Base Plate-2 for RS 210 – 1400, galv.** For assembly of Push-Pull Props RS 210, 260, 300, 450, 650, 1000 and 1400.	**Complete with** 2 pc. 105400 Pin Ø 20 x 140, galv. 2 pc. 018060 Cotter Pin 4/1, galv.




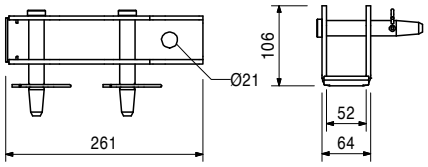


Accessories

124777	0.210	**Anchor Bolt PERI 14/20 x 130**

126666	3.070	**Base Plate-3 for RS 210 – 1400** For assembly of Push-Pull Props RS 210, 260, 300, 450, 650, 1000 and 1400.	**Complete with** 2 pc. 105400 Pin Ø 20 x 140, galv. 2 pc. 018060 Cotter Pin 4/1, galv. 1 pc. 113063 Bolt ISO 4014 M12 x 80-8.8, galv. 1 pc. 113064 Hex Nut ISO7042-M12-8-G, galv.




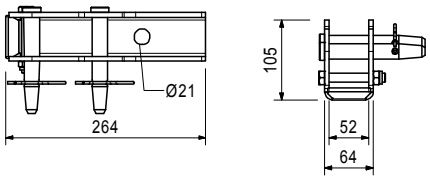


Accessories


124777	0.210	**Anchor Bolt PERI 14/20 x 130**


Item no.	Weight kg		
028010	17.900	**Push-Pull Prop RSS I** Extension length l = 2.05 – 2.94 m. For aligning PERI formwork systems.	**Note** Permissible load see PERI Design Tables.



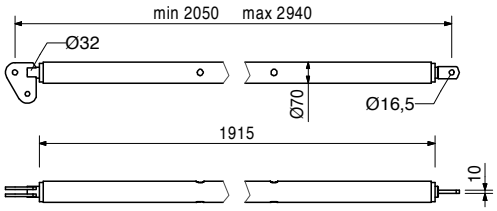



113397	1.600	**Spindle Handle RSS / AV** Spindle Handle for screwing on Push-Pull Props RSS I, RSS II, RSS III and Kickers AV 210 and AV 190 complete with 2 bolts and nuts M8.	



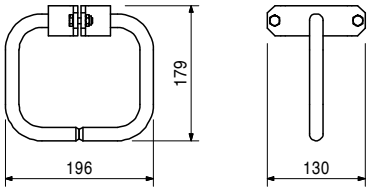



028020	22.000	**Push-Pull Prop RSS II** Extension length l = 2.91 – 3.80 m. For aligning PERI formwork systems.	**Note** Permissible load see PERI Design Tables.

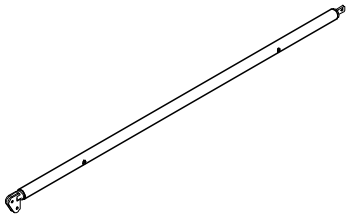

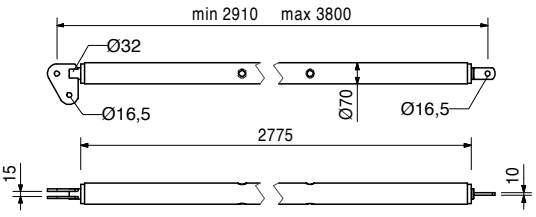



028030	38.400	**Push-Pull Prop RSS III** Extension length l = 4.60 – 6.00 m. For aligning PERI formwork systems.	**Note** Permissible load see PERI Design Tables.

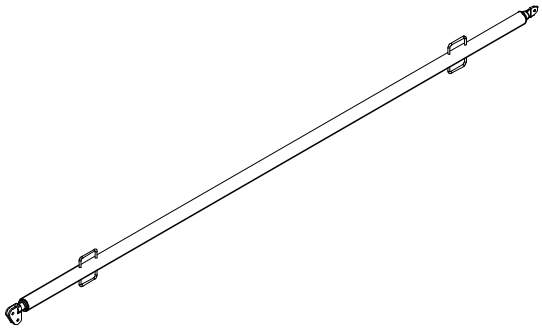

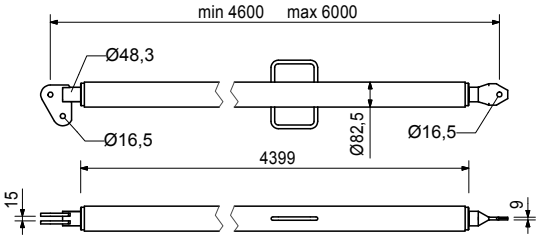

Item no.	Weight kg		
106000	1.820	**Base Plate-2 for RSS, galv.** For assembly of RSS Push-Pull Props.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv.




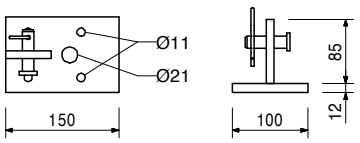


Accessories


124777	0.210	**Anchor Bolt PERI 14/20 x 130**


		Kickers AV	**min. L**	**max. L**
057087	3.720	**Kicker AV 82**	500	820
057088	4.410	**Kicker AV 111**	790	1110
		For aligning PERI formwork systems.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv. **Note** Permissible load see PERI Design Tables.	



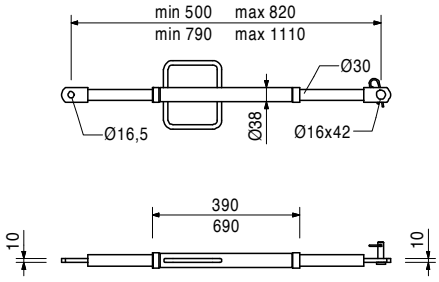



028110	5.180	**Kicker AV 140** Extension length l = 1.08 – 1.40 m. For aligning PERI formwork systems.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv. **Note** Permissible load see PERI Design Tables.



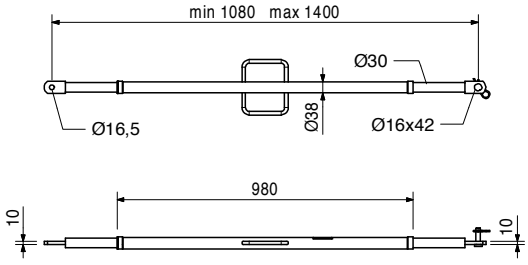



Item no.	Weight kg		
108135	12.900	**Kicker AV 210** Extension length l = 1.28 – 2.10 m. For aligning PERI formwork systems.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv. **Note** Permissible load see PERI Design Tables.



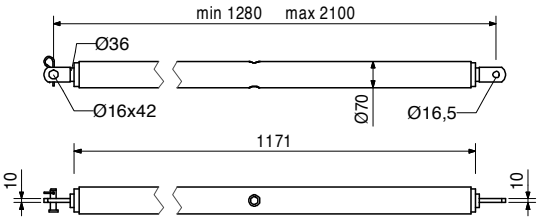



028120	17.000	**Kicker AV RSS III** Extension length l = 2.03 – 2.92 m. For aligning PERI formwork systems.	**Complete with** 1 pc. 027170 Pin Ø 16 x 42, galv. 1 pc. 018060 Cotter Pin 4/1, galv. **Note** Permissible load see PERI Design Tables.

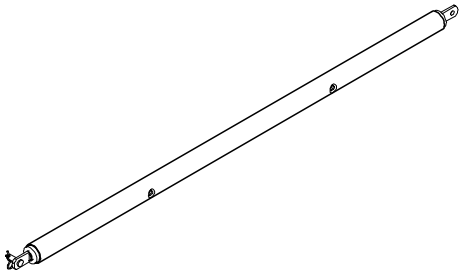

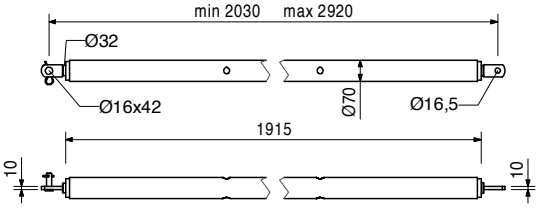

124777	0.210	**Anchor Bolt PERI 14/20 x 130** For temporary fixation to reinforced concrete structures.	**Note** See PERI data sheet! Drilling Ø 14 mm.





PERI

Formwork
Scaffolding
Engineering

www.peri.com





DE en 06|2016 5sm 791510 © PERI GmbH