

Climbing Systems

CB 160 Climbing Formwork

Product Catalogue

CB 160 Climbing Formwork





Item no.	Weight kg
051100	79.700

Climbing Bracket CB 160
Complete Climbing Scaffold Bracket CB 160.

Complete with
2 pc. 017040 Screw-On Coupler AK 48, galv.
1 pc. 701209 Guardrail Post CB 160
1 pc. 710222 Bolt ISO 4014 M16 x 80-8.8, galv.
1 pc. 070890 Nut ISO 7040 M16-8, galv.



Note
Delivery condition: handrail post in transport securing device.

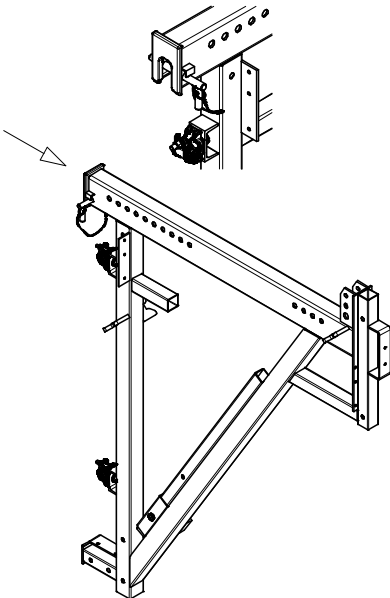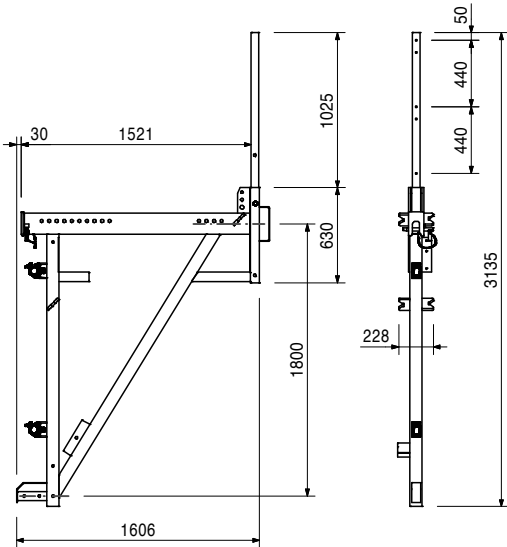

051130	12.900
--------	--------

Adjusting Unit CB 160
For Climbing Bracket CB 160.

Complete with
2 pc. 711084 Bolt ISO 4014 M20 x 150-8.8, galv.
2 pc. 781053 Nut ISO 7042 M20-8, galv.

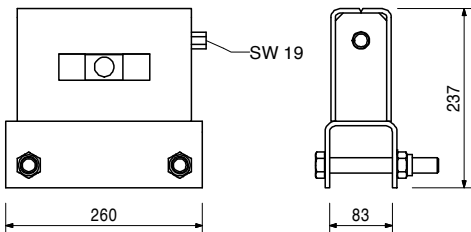

CB 160 Climbing Formwork

Item no.	Weight kg
051120	4.590

Platform Connection CB 160

For moving platform units and for mounting platform decking on the Climbing Bracket CB 160 when used as working scaffold.

Complete with



2 pc. 711078 Bolt ISO 4014 M20 x 130-8.8, galv.
2 pc. 781053 Nut ISO 7040 M20-8, galv.

Note

Follow Instructions for Use!

Technical Data

Permissible load-bearing capacity 500 kg.

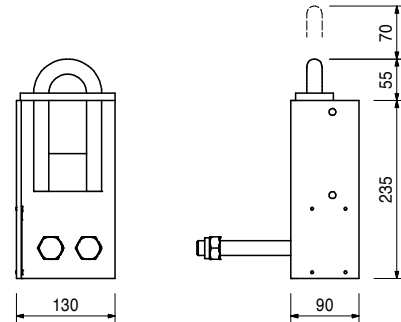

051060	73.400
051150	103.000

Strongbacks CB

Strongback CB 270

Strongback CB 380



For assembling system formwork on Climbing Brackets CB 240 and 160. For formwork heights up to 5.40 m.

Complete with

1 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6
1 pc. 018060 Cotter Pin 4/1, galv.

Technical Data

Permissible load-bearing point capacity 1.9 t.

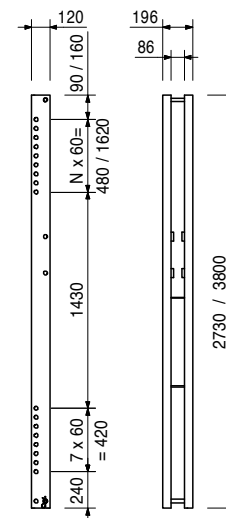



051030	5.530
--------	-------

Height Adjusting Unit CB, SCS

For height adjustment of VARIO GT 24 Panels on the Strongbacks CB and SCS.

Complete with

1 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6
1 pc. 018060 Cotter Pin 4/1, galv.

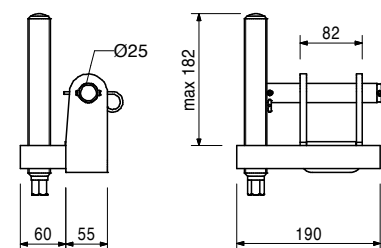


CB 160 Climbing Formwork




Item no.	Weight kg
051110	25.300

Adjustable Brace CB 164-224
For aligning the Strongback CB.




Complete with
2 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6
2 pc. 018060 Cotter Pin 4/1, galv.

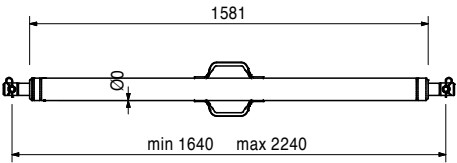


051090	13.700
--------	--------

Connector TRIO-CB
For fixing TRIO panels to the Strongback CB. Used on horizontal or vertical struts. With integrated height adjustment.




Complete with
1 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6
1 pc. 018060 Cotter Pin 4/1, galv.

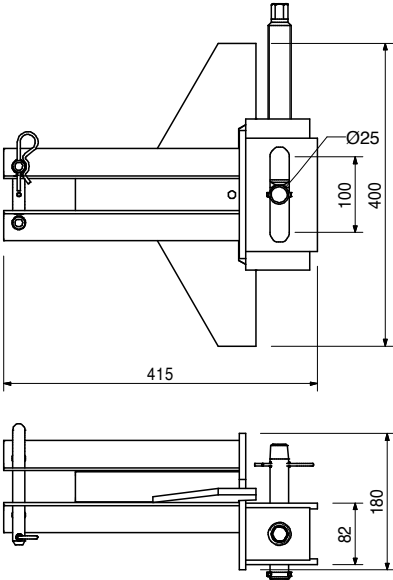


110059	2.840
--------	-------

Waler Fixation U100 – U120
For fixing VARIO GT 24 Panels to Strongbacks CB, SCS and Steel Waler SRU.



Complete with
1 pc. 110055 Cross Clamp, galv.
1 pc. 118260 Spherical Nut RD 16, galv.

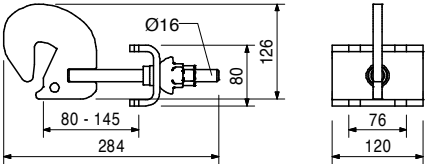


CB 160 Climbing Formwork

Item no.	Weight kg
129689	6.960


Height Adjusting Unit-2 CB/SCS/RCS

For height adjustment of RUNDFLEX panels on the Strongbacks CB/RCS/SCS.



Complete with


1 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6
1 pc. 018060 Cotter Pin 4/1, galv.

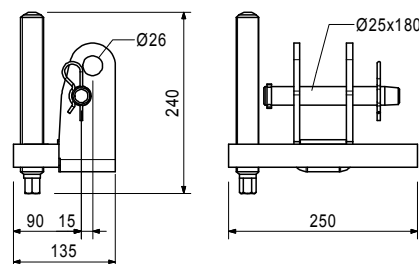

129720	8.040
--------	-------


Waler Fixation-2 U100 – U120

For fixing VARIO GT 24 Panels to Strongbacks CB, SCS, Steel Waler SRU if anchoring is done through the strongback.





Complete with

2 pc. 118260 Spherical Nut RD 16, galv.

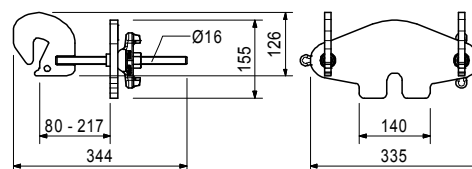


127633	38.700
--------	--------

Formwork Waler 150 CB



127659	3.980
--------	-------

Clamp Adapter MX/TR-SRU





CB 160 Climbing Formwork



Item no.	Weight kg
051230	17.000

Finishing Platform Beam CB
For assembling finishing platforms.


Complete with
4 pc. 710232 Bolt ISO 4014 M16 x 130-8.8, galv.
4 pc. 070890 Nut ISO 7042 M16-8, galv.

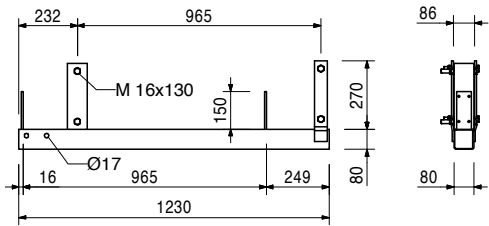

051200	44.400
--------	--------

Platform Post CB 225
For assembling finishing platforms. For concreting heights up to 3.60 m. In combination with Post Extension CB 180 for concreting heights from 3.60 to 5.40 m.

Complete with
2 pc. 710232 Bolt ISO 4014 M16 x 130-8.8, galv.
2 pc. 070890 Nut ISO 7042 M16-8, galv.

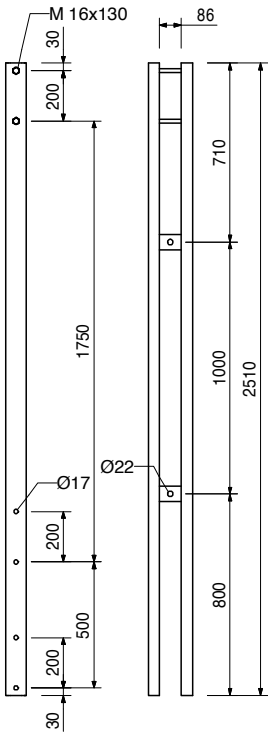

CB 160 Climbing Formwork




Item no.	Weight kg
051050	26.400

Post Extension CB 180

For assembling finishing platforms. In combination with Platform Post CB 225 for concreting heights from 3.60 to 5.40 m.

Complete with

2 pc. 710232 Bolt ISO 4014 M16 x 130-8.8, galv.
2 pc. 070890 Nut ISO 7042 M16-8, galv.

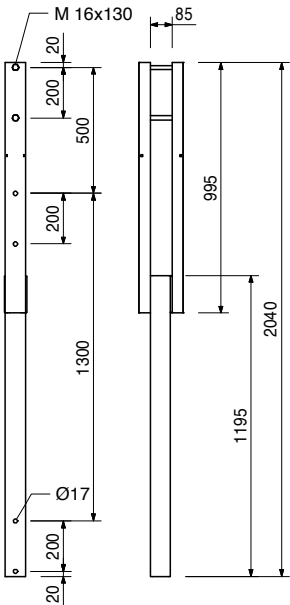


051190	17.400
--------	--------

Handrail Post CB 200

For assembling guardrails on finishing platforms. Basic extension for Handrail Post CB 190 and 370.

Complete with

1 pc. 710232 Bolt ISO 4014 M16 x 130-8.8, galv.
1 pc. 070890 Nut ISO 7042 M16-8, galv.

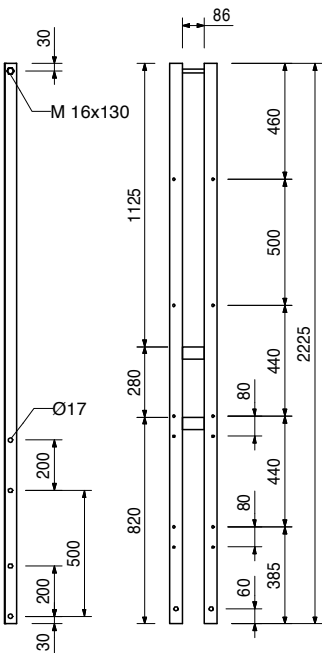

CB 160 Climbing Formwork




Item no.	Weight kg
051210	19.000
051220	34.600

Handrail Posts CB
Handrail Post CB 190
Handrail Post CB 370



For assembling guardrails on finishing platforms.
Handrail Post CB 190 for concreting heights up to 3.60 m. Handrail Post CB 370 for concreting heights from 3.60 to 5.40 m.





Complete with
2 pc. 710232 Bolt ISO 4014 M16 x 130-8.8, galv.
2 pc. 070890 Nut ISO 7042 M16-8, galv.

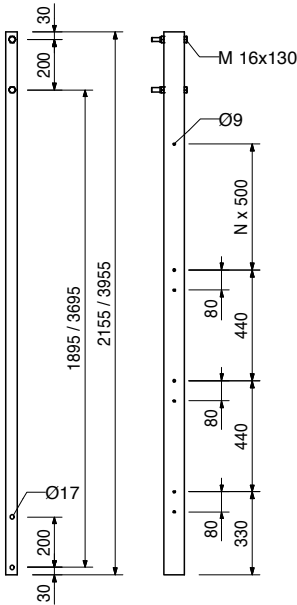

			L
026415	3.550	Scaffold Tubes Steel Ø 48.3 x 3.2	
026417	0.000	Scaff. Tube Steel Ø 48.3 x 3.2, special length	
026411	3.550	Cutting Cost Scaffold Tube	
026412	7.100	Scaff. Tube Steel Ø 48.3 x 3.2, l = 1.0 m	1000
125976	8.900	Scaff. Tube Steel Ø 48.3 x 3.2, l = 2.0 m	2000
026413	10.650	Scaff. Tube Steel Ø 48.3 x 3.2, l = 2.5 m	2500
114287	12.500	Scaff. Tube Steel Ø 48.3 x 3.2, l = 3.0 m	3000
026414	14.200	Scaff. Tube Steel Ø 48.3 x 3.2, l = 3.5 m	3500
026419	17.750	Scaff. Tube Steel Ø 48.3 x 3.2, l = 4.0 m	4000
026418	21.600	Scaff. Tube Steel Ø 48.3 x 3.2, l = 5.0 m	5000
		Scaff. Tube Steel Ø 48.3 x 3.2, l = 6.0 m	6000





017010	1.400	Swivel Coupling DK 48/48, galv. For Scaffold Tubes Ø 48 mm.
--------	-------	---





Item no.	Weight kg
017020	1.120

Standard Coupler NK 48/48, galv.
For Scaffold Tubes Ø 48 mm.





131404	1.080
--------	-------

Screw-On Coupler HT Ø 48-M20, galv.
For Screwing Scaffold Tubes Ø 48 mm to components up to 9 mm thickness.



051160	1.050
--------	-------


Guardrail Connector CB
For assembling scaffold tubes on handrail posts.

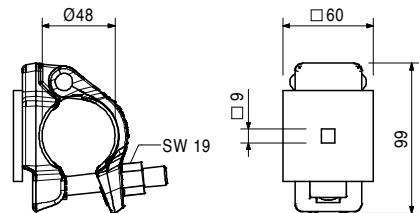

126228	0.030	Accessories
		F.H. Bolt DIN 603 M8 x 70 MU, galv.

Item no.	Weight kg
051610	6.940

Side Guardrail Post CB
For assembly of an end guardrail. Bolted to the platform main beam.


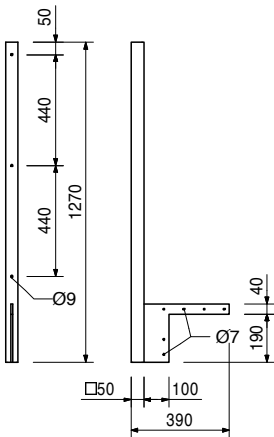


051640	0.014
--------	-------

Accessories
Lag Screw DIN 571 6 x 80, galv.

051630	11.000
--------	--------

Intermediate Handrail Post CB
For assembling a guardrail with large cantilevers. Bolted on the platform main beam.

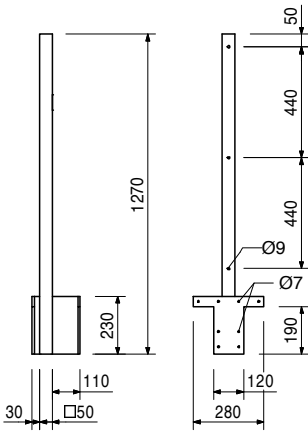

051640	0.014
051610	6.940

Accessories
Lag Screw DIN 571 6 x 80, galv.
Side Guardrail Post CB


CB 160 Climbing Formwork



Item no.	Weight kg
126399	4.710



Handrail Post Extension CB
For the extension of guardrail post CB by 50 cm.

Complete with
1 pc. 710222 Bolt ISO 4014 M16 x 80-8.8, galv.
1 pc. 070890 Nut ISO 7040 M16-8, galv.

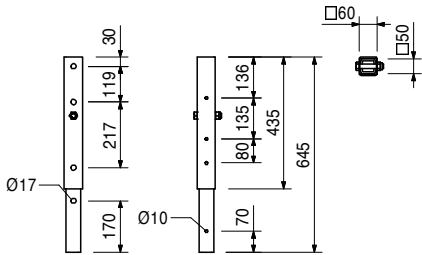

065066	15.100
--------	--------



End Guardrail Frame 55
Clampable end guardrail for all PERI Scaffold Platforms and Climbing Systems.

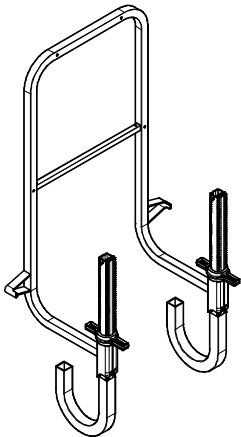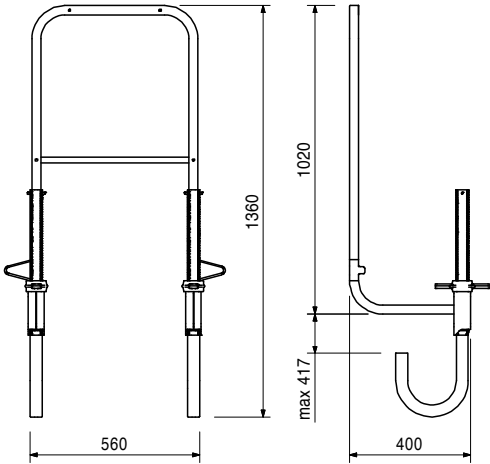

051640	0.014
024260	0.027
024520	0.052

Lag Screws DIN 571, galv.
Lag Screw DIN 571 6 x 80, galv.
Lag Screw DIN 571 8 x 80, galv.
Lag Screw DIN 571 8 x 160, galv.



L
80
80
160





CB 160 Climbing Formwork




Item no.	Weight kg		L
024540	0.005	TSS-Torx	40
024690	0.008	TSS-Torx 6 x 40, galv.	80
		TSS-Torx 6 x 80, galv.	
		For Torx Bits TX 30. Self-drilling.	





051650	0.060	F.H. Bolt DIN 603 M6 x 180 MU, galv.
		With nut.



710240	0.050	F. H. Bolts DIN 603 M8, galv.	L	B
024360	0.058	F.H. Bolt DIN 603 M8 x 100 MU, galv.	100	80
108834	0.085	F.H. Bolt DIN 603 M8 x 125 MU, galv.	125	113
		F.H. Bolt DIN 603 M8 x 180 MU, galv.	180	28
		With nut.		





029470	0.723	Scaffold Mounting Ring M24, galv.
		Anchor System M24.
		For anchoring climbing systems.



029560	0.535	Accessories
		Bolt ISO 4014 M24 x 120-10.9, galv.

Item no.	Weight kg
029560	0.535



Bolt ISO 4014 M24 x 120-10.9, galv.
High-strength bolts for anchoring climbing systems.



114158	1.030
--------	-------

Screw-On Cone-2 M24/DW 20, galv.
Anchor system M24.
For anchoring climbing systems.

Note
Separate design information on request.

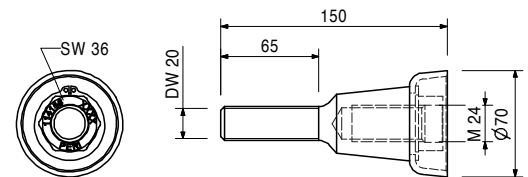



030860	0.792
--------	-------

Accessories
Threaded Anchor Plate DW 20

030860	0.792
--------	-------

Threaded Anchor Plate DW 20
For use with Tie Rod DW 20, B 20 or Screw-On Cone-2 M24/DW 20. For anchoring in concrete.



Note
Lost anchor part.

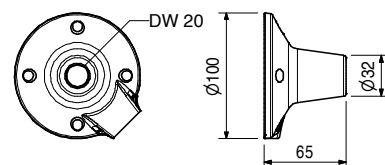

031220	1.010
--------	-------

Climbing Cone-2 M24/DW 15, galv.
Anchor system M24.
For anchoring climbing systems.

Note
Separate design information on request.

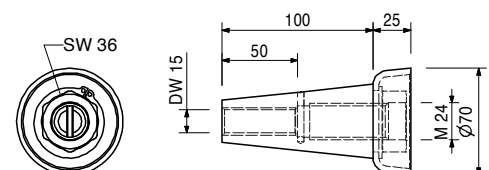



030840	0.515
030030	1.440
030740	1.550

Accessories
Threaded Anchor Plate DW 15
Tie Rod DW 15, spec. length
Tie Rod B 15, spec. length


030840	0.515
--------	-------

Threaded Anchor Plate DW 15
For use with Tie Rod DW 15 or B 15. For anchoring in concrete.


Note
Lost anchor part.





Item no.	Weight kg		
030030	1.440	Tie Rod DW 15	Note Non-weldable! Take official Approval into consideration! Technical Data Permissible tension force 90 kN.
030050	0.000	Tie Rod DW 15, spec. length	
		Cutting Cost Tie Rod DW 15, B 15	





030740	1.550	Tie Rod B 15	Note Weldable! Take official Approval into consideration! Technical Data Permissible tension force 82 kN.
030050	0.000	Tie Rod B 15, spec. length	
		Cutting Cost Tie Rod DW 15, B 15	



065027	0.359	Spacer Tubes rough DR 22	L 2000 270 210
065031	0.050	Spacer Tube rough DR 22, l = 2.00 m	
065030	0.039	Spacer Tube rough DR 22, l = 0.27 m	
065030	0.039	Spacer Tube rough DR 22, l = 0.21 m	



031652	0.247	KK Concrete Cone M24-67/52	Note Delivery unit 50 pieces.
		For closing anchor points with Climbing Cone-2, M24/DW 15 and Screw-On Cone-2 M24/DW 20.	



131709	9.980	Accessories	
		Sealing Compound-3, 6 cans-set	

Item no.	Weight kg
131709	9.980

Sealing Compound-3, 6 cans-set

For bonding PERI concrete cones.


Note

See Safety Data sheet!

Consisting of:

6 x Component A,



6 x Component B



029270	0.331
--------	-------

Advancing Bolt M24, galv.

For fixing the M24 anchor system if the plywood formlining is drilled through.



Accessories



029280	0.196
--------	-------

Anchor Positioning Plate M24, galv.

029280	0.196
--------	-------

Anchor Positioning Plate M24, galv.

For fixing the M24 anchor system if the plywood formlining is drilled through.




Accessories

029440	0.005
--------	-------

Lag Screw DIN 571 6 x 20, galv.

029440	0.005
--------	-------

Lag Screw DIN 571 6 x 20, galv.



CB 160 Climbing Formwork


Item no.	Weight kg
026420	0.123

Anchor Positioning Stud M24, galv.

For fixing the M24 anchor system if the plywood formlining is not drilled through.

Note

Allen Key SW 14.



Accessories

027212	0.445
710312	0.005

Allen Key SW 14, long
Nail 3 x 80



107007	3.410
--------	-------

Tension Anchor Connector CB

To prevent tipping over due to wind loads with Tie Rod DW 15.

Complete with

1 pc. 710219 Bolt ISO 4014 M16 x 100-8.8, galv.
1 pc. 070890 Nut ISO 7040 M16-8, galv.

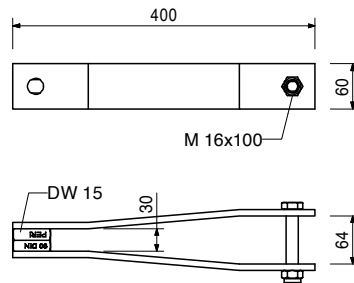

Accessories

116807	1.820
030030	1.440
107008	4.100
116752	5.050

Turnbuckle CB M20/DW 15
Tie Rod DW 15, spec. length
Wall Tension Anchor
Wall Bracing Shoe CB M24



116807	1.820
--------	-------

Turnbuckle CB M20/DW 15

For tensioning of Tie Rod DW 15 to prevent tipping over due to wind loads. Connects Tie Rod DW 15 with Wall Bracing Shoe CB M24.

Complete with

1 pc. 711059 Turnbuckle for tension anchor CB
1 pc. 711060 Eye Bolt M20, left, galv.





107008	4.100
--------	-------

Wall Tension Anchor

Alternative wall connector to prevent tipping over due to wind loads with Tie Rod DW 15. Including Turnbuckle CB M20/DW 15.

Complete with

1 pc. 027170 Pin Ø 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.

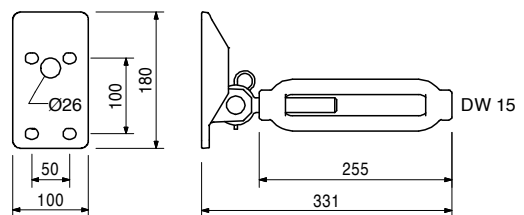

Accessories


026430	0.334
--------	-------

Bolt ISO 4014 M24 x 70-10.9, galv.

Item no.	Weight kg
051260	3.300


Tension Belt Connector CB

To prevent tipping over due to wind loads with tension belt.



Complete with

1 pc. 710219 Bolt ISO 4014 M16 x 100-8.8, galv.
1 pc. 070890 Nut ISO 7040 M16-8, galv.

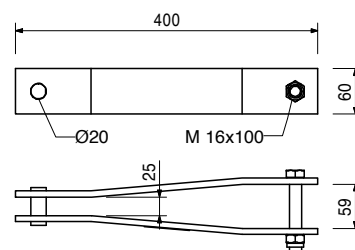

Accessories

051250	2.790
051270	1.620
116752	5.050

Tension Belt, l = 5.70 m, 2.5 t

Tension Belt Connector Wall M24

Wall Bracing Shoe CB M24

051250	2.790
--------	-------

Tension Belt, l = 5.70 m, 2.5 t



To prevent climbing systems from tipping over due to wind loads.

Note

Follow Instructions for Assembly and Use!

Technical Data



Permissible tension force 2.5 t.

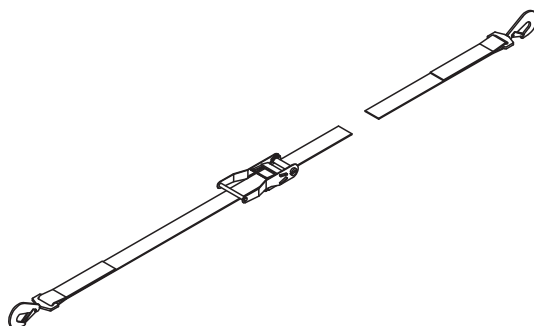

051270	1.620
--------	-------

Tension Belt Connector Wall M24

Wall connector to prevent tipping over due to wind loads with Tension Belt. To be used for climbing systems CB and FB.



Accessories

026430	0.334
--------	-------

Bolt ISO 4014 M24 x 70-10.9, galv.



Item no.	Weight kg
116752	5.050

Wall Bracing Shoe CB M24

To prevent tipping over due to wind loads with Tension Belt or Tie Rod DW 15 and to stabilise the finishing platform. To be mounted on the Climbing Anchor M24 embedded in the concrete.

Complete with

2 pc. 104031 Fitting Pin Ø 21 x 120
2 pc. 018060 Cotter Pin 4/1, galv.

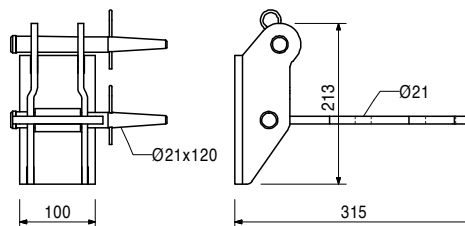

Accessories



026430	0.334
--------	-------

Bolt ISO 4014 M24 x 70-10.9, galv.

026430	0.334
--------	-------

Bolt ISO 4014 M24 x 70-10.9, galv.



High-strength bolt for anchoring climbing systems.



129693	3.130
--------	-------

Tension Anchor Connector CB/SCS

For connecting the wind suspension with Tie Rod DW 15 to the Crossbeam Unit SCS 250 / 190 or CB Climbing Bracket.



Accessories

711084	0.420
781053	0.065



Bolt ISO 4014 M20 x 150-8.8, galv.

Nut ISO 7040 M20-8, galv.

Item no.	Weight kg
027180	1.760

Ratchet Lever SW 19

For operation of the adjusting unit and of the carriage with drive shaft SW 19.

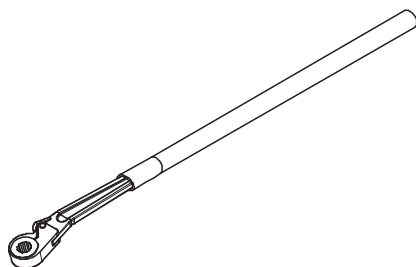

Accessories



027200	0.100
--------	-------

Insert Socket SW 19

031480	2.460
--------	-------

Socket Wrench SW 36, chrome-plated


For various purposes.



027212	0.445
--------	-------



Allen Key SW 14, long

Fits to PERI Anchor Positioning Studs and Allen Key Bolts M16.



072180	0.560
--------	-------

Ratchet Wrench 1/2"



029620	0.075
--------	-------

Socket SW 19-1/2"

Fits to Hex. Bolts M12 or Height Adjusting Unit SW 19.





Item no.	Weight kg
118638	8.790

Arch. Anchor Sleeve M24-150/2
Centre piece of the double-sided architectural concrete anchoring CB. Anchor Tie DW 15 is passing through.
Plate size 150 mm.

Note
Specify wall thickness D.
Seperate design information on request.



Technical Data
Min. D = 200 mm.
Max. D = 400 mm.
L = D -130 mm.

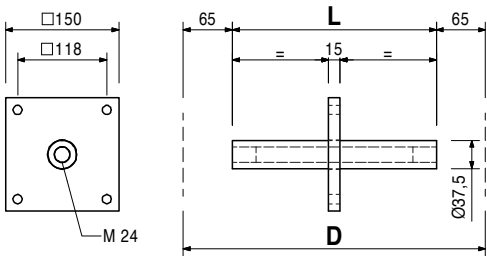

126793	3.190
126795	3.490

Arch. Anchor Sleeve M24-150/2
Arch. Anchor Sleeve M24-150/2, D = 25
Arch. Anchor Sleeve M24-150/2, D = 30

Note
Seperate design information on request.


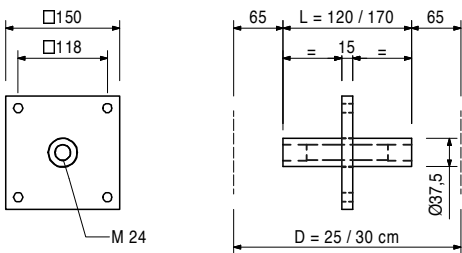


116279	7.530
--------	-------

Arch. Anchor Sleeve M24-120/2
Centre piece of the double-sided architectural concrete anchoring CB. Anchor Tie DW 15 is passing through.
Plate size 120 mm.

Note
Specify wall thickness D.
Seperate design information on request.

Technical Data
Min. D = 200 mm.
Max. D = 400 mm.
L = D -130 mm.

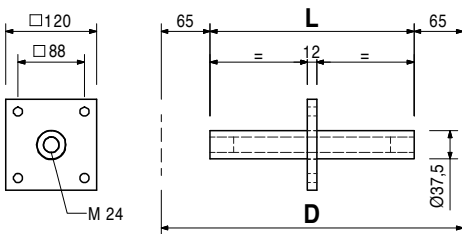



Item no.	Weight kg
116385	0.189

Arch. Leading Cone M24/DW 26

Leading cone for single- or double-sided architectural concrete anchorings CB.
Creates a recess for Arch. Mounting Cone M24 and Concrete Cone DK 58/52.

Note

Plastic version.

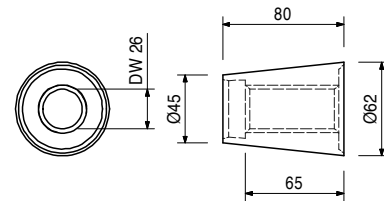

Accessories

115499	0.878
--------	-------

Leading Cone Screw DW 26

125512	0.966
--------	-------



Arch. Leading Cone M24/DW 26 Steel

Leading cone for single- or double-sided architectural anchorings CB.
Creates a recess for Arch. Mounting Cone M24 and concrete cone DK 58/52.
Can also be used as shear cone for anchoring FB or KG Brackets.

Note

Steel version.

Seperate design information on request.

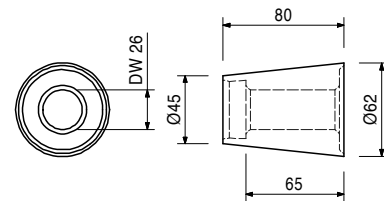

Accessories

115499	0.878
--------	-------

Leading Cone Screw DW 26

125963	3.100
--------	-------

Arch. Anchor Sleeve M24-150/1



Anchor sleeve for single-sided architectural concrete anchoring CB.
Anchor Tie DW 15 is passing through.
Plate size 150 mm.

Note

Seperate design information on request.

Technical Data

Fixed embedment depth 170 mm.
Min. wall thickness 200 mm.

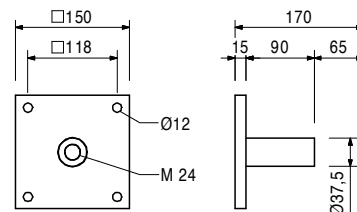

Accessories

065027	0.359
065033	0.010

Spacer Tube rough DR 22, l = 2.00 m Cone DR 22



Item no.	Weight kg
114606	1.630

Arch. Mounting Cone M24

For anchoring climbing systems compatible with Mounting Ring M24.
Fixation to Arch. Anchor Sleeves M24-120/2, M24-150/2 or M24-150/1.

Note

Seperate design information on request.

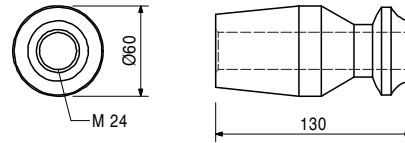



Accessories

057138	0.665
--------	-------

Hex. Bolt ISO 4014 M24 x 160-8.8, galv.

057138	0.665
--------	-------

Hex. Bolt ISO 4014 M24 x 160-8.8, galv.





031642	0.152
--------	-------

DK Concrete Cone DW 15-58/30

For closing anchor points with DK Sealing Cone DW 15/35, DW 15/55, DW 20/55, DW 26/55, SK Anchor Cone DW 15, Magnet Cone MX 15 - 55, Magnet Cone MX 18 - 55, Arch. Leading Cone M24.

Note

Delivery unit 50 pieces.





031643	0.241
--------	-------








DK Concrete Cone UNI 58/52

For closing anchor points with DK Sealing Cone DW 15/55, DW 20/55, DW 26/55, SK Anchor Cone DW 15, Magnet Cone MX 15 - 55, Magnet Cone MX 18 - 55, Arch. Leading Cone M24.

Note



Delivery unit 50 pieces.



Item no.	Weight kg		
031641	0.208	<p>DK Concrete Cone Architec. DW 15-58/52 For closing anchor points with DK Sealing Cone DW 15/55, DW 20/55, DW 26/55, SK Anchor Cone DW 15, Magnet Cone MX 15 - 55, Magnet Cone MX 18 - 55, Arch. Leading Cone M24 with corresponding architectural requirements.</p>  	<p>Note Delivery unit 50 pieces.</p>
131709	9.980	<p>Sealing Compound-3, 6 cans-set For bonding PERI concrete cones.</p> 	<p>Note See Safety Data sheet! Consisting of: 6 x Component A, 6 x Component B</p>
065027	0.359	<p>Spacer Tube rough DR 22, l = 2.00 m Plastic Spacer Tube for DW 15, B 15.</p>  	
065033	0.010	<p>Cone DR 22 Plastic. Suitable for Spacer Tube DR 22.</p>  	<p>Note Delivery unit 500 pieces.</p>
065036	0.002	<p>Plug DR 22 Plastic. Suitable for Spacer Tube DR 22.</p>  	<p>Note Delivery unit 1000 pieces.</p>



Item no.	Weight kg
115499	0.878

Leading Cone Screw DW 26
For recovering the Arch. Leading Cone M24/DW 26.

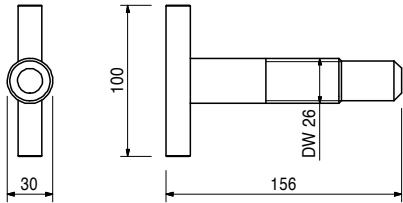



031480	2.460
--------	-------

Socket Wrench SW 36, chrome-plated
For various purposes.





031644	0.588
--------	-------

DK Tong for Concrete Cone 58
For holding DK, SK or KK Concrete Cones with corresponding diameter during installation.

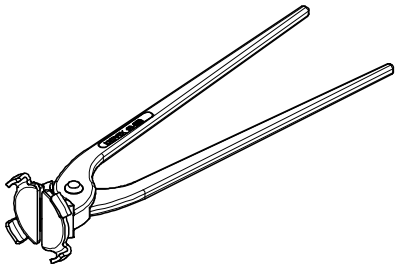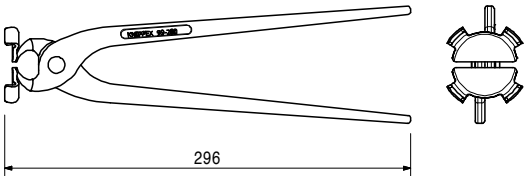

101995	1.020
--------	-------


Concrete Cone Gauge
Installation of concrete cones flush with the surface.



Item no.	Weight kg
126431	12.300


Hatch 55 x 60-2, foldable

Self-closing hatch for ladder access. Clear opening approx. 55 x 60 cm. Ladder fixation with bolts or by hanging up.



Complete with

1 pc. 126785 Hatch Hinge RCS
12 pc. 108647 Rivet DIN 7337- A5 x 20
2 pc. 022230 Cotter Pin 5/1, galv.

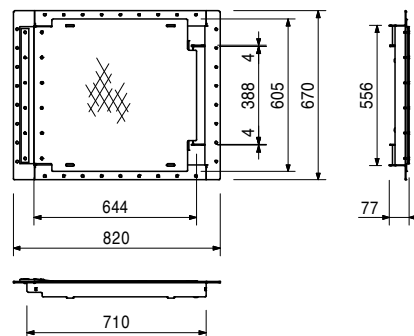

Accessories


710224	0.047
710381	0.017

Bolt ISO 4017 M12 x 40-8.8, galv.
Nut ISO 7042 M12-8, galv.

110608	15.600
--------	--------


Hatch 55 x 60, foldable

Self-closing hatch for ladder access. Clear opening approx. 55 x 60 cm. Ladder fixation with bolts.



Complete with

1 pc. 110529 Hinging Plate left, galv.
1 pc. 110535 Hinging Plate right, galv.
8 pc. 721412 Rivet DIN 7337 - A4,8 x 12

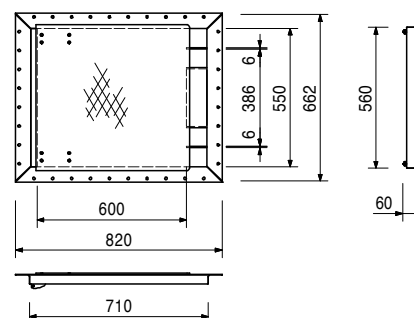

Accessories


710224	0.047
710381	0.017

Bolt ISO 4017 M12 x 40-8.8, galv.
Nut ISO 7042 M12-8, galv.

051430	37.900
--------	--------


Sliding Hatch Cover

Non self-closing hatch for ladder access. Clear opening approx. 73 x 55 cm. Ladder fixation with bolts.

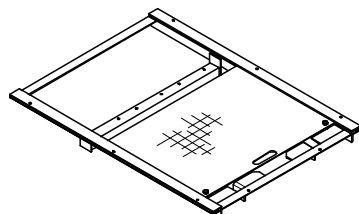

Complete with

4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
4 pc. 710381 Nut ISO 7042 M12-8, galv.

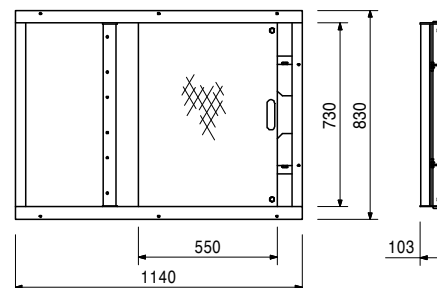


CB 160 Climbing Formwork




Item no.	Weight kg
051410	11.700

Ladder 180/6, galv.
As access for PERI Formwork Systems.

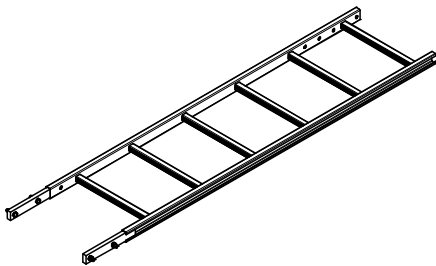


Complete with
4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv.
4 pc. 710381 Nut ISO 7042 M12-8, galv.

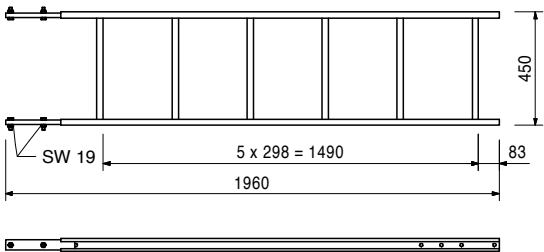


051420	12.800
--------	--------

Ladder 220/6, galv.
As access for PERI formwork systems.

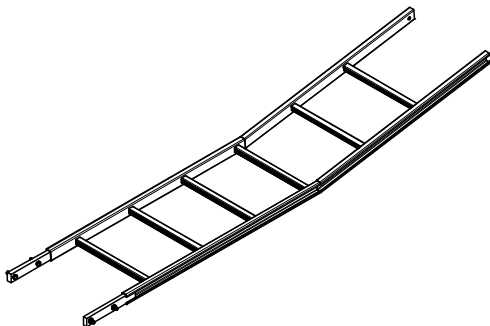


Complete with
4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv.
4 pc. 710381 Nut ISO 7042 M12-8, galv.

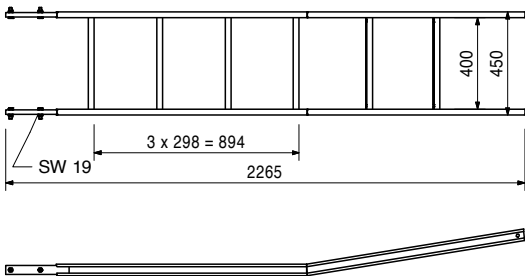


103724	10.400
--------	--------

End Ladder 180/2, galv.
As access for PERI Formwork Systems.


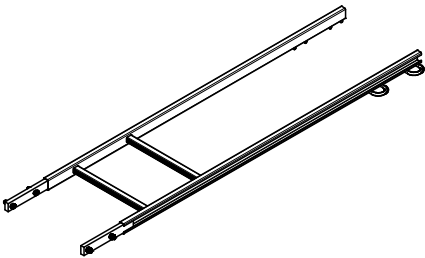


Complete with
4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv.
4 pc. 710381 Nut ISO 7042 M12-8, galv.

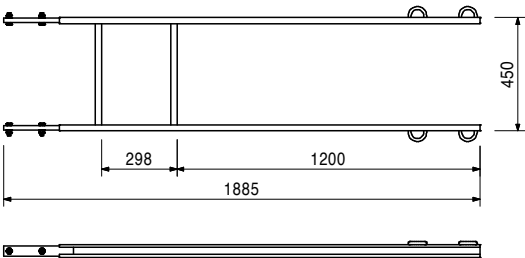

109105	5.070
--------	-------



Ladder Base 30 adjustable, galv.
For horizontal fixing of ladders on the platform decking.

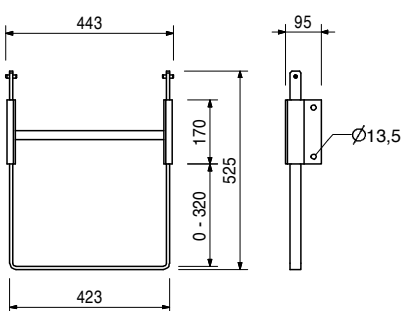

Item no.	Weight kg
051460	2.180

Ladder Base, galv.

As bottom ladder connection and for securing ladders against sliding on the scaffold decks.



103718	0.684
--------	-------


Ladder Hook, galv.

For adjusting the bottom ladder.
Always use in pairs.



Complete with

2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
2 pc. 710381 Nut ISO 7042 M12-8, galv.




104132	15.600
051450	25.200

Ladder Safety Cages, galv.

Ladder Safety Cage 75, galv.


Ladder Safety Cage 150, galv.

Ladder safety cage for PERI Access Ladders.



Complete with


4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
4 pc. 701763 Clamping Plate FI 25 x 10 x 90

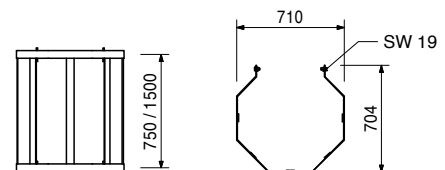

111165	6.080
--------	-------


Ladder Connector VARIO, adjustable

For connecting ladders to Steel Walers SRZ and SRU, Profile U100 – U120.





Complete with

2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
2 pc. 701763 Clamping Plate FI 25 x 10 x 90

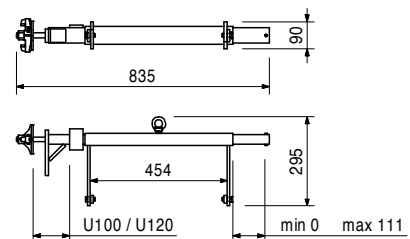

Item no.	Weight kg		L
075100	5.300	Girders GT 24	918
075120	7.100	Girder GT 24, l = 0.90 m	1214
075150	8.900	Girder GT 24, l = 1.20 m	1510
075180	10.600	Girder GT 24, l = 1.50 m	1806
075210	12.400	Girder GT 24, l = 1.80 m	2102
075240	14.200	Girder GT 24, l = 2.10 m	2398
075270	15.900	Girder GT 24, l = 2.40 m	2694
075300	17.700	Girder GT 24, l = 2.70 m	2990
075330	19.500	Girder GT 24, l = 3.00 m	3286
075360	21.200	Girder GT 24, l = 3.30 m	3582
075390	23.000	Girder GT 24, l = 3.60 m	3878
075420	24.800	Girder GT 24, l = 3.90 m	4174
075450	26.600	Girder GT 24, l = 4.20 m	4470
075480	28.300	Girder GT 24, l = 4.50 m	4766
075510	30.100	Girder GT 24, l = 4.80 m	5062
075540	31.900	Girder GT 24, l = 5.10 m	5358
075570	33.600	Girder GT 24, l = 5.40 m	5654
075600	35.400	Girder GT 24, l = 5.70 m	5950

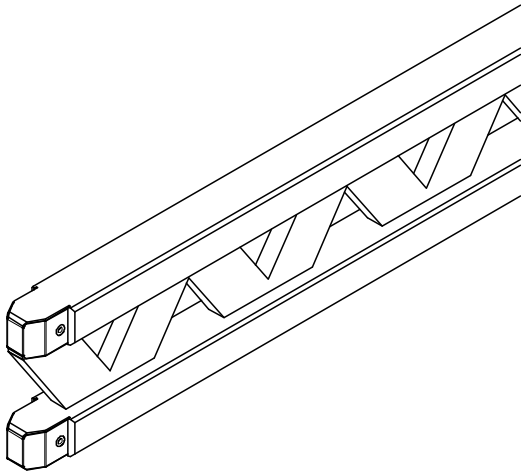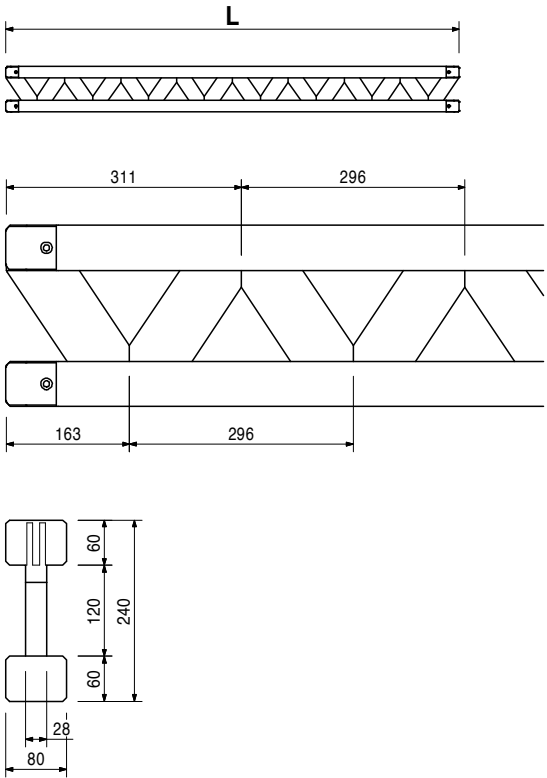

Item no.	Weight kg	
		Girders GT 24
078010	36.875	Girder GT 24, l = 6.25 m
078020	38.645	Girder GT 24, l = 6.55 m
078030	40.415	Girder GT 24, l = 6.85 m
078040	42.185	Girder GT 24, l = 7.15 m
078050	43.955	Girder GT 24, l = 7.45 m
078060	45.725	Girder GT 24, l = 7.75 m
078070	47.200	Girder GT 24, l = 8.00 m
078080	48.970	Girder GT 24, l = 8.30 m
078090	50.740	Girder GT 24, l = 8.60 m
078100	52.510	Girder GT 24, l = 8.90 m
078110	54.280	Girder GT 24, l = 9.20 m
078130	57.820	Girder GT 24, l = 9.80 m
078140	59.590	Girder GT 24, l = 10.10 m
078150	61.360	Girder GT 24, l = 10.40 m
078160	63.130	Girder GT 24, l = 10.70 m
078170	64.900	Girder GT 24, l = 11.00 m
078180	66.670	Girder GT 24, l = 11.30 m
078190	68.145	Girder GT 24, l = 11.55 m
078200	69.915	Girder GT 24, l = 11.85 m