

PERI®

Product Catalogue
VIL Incremental Launching Facility

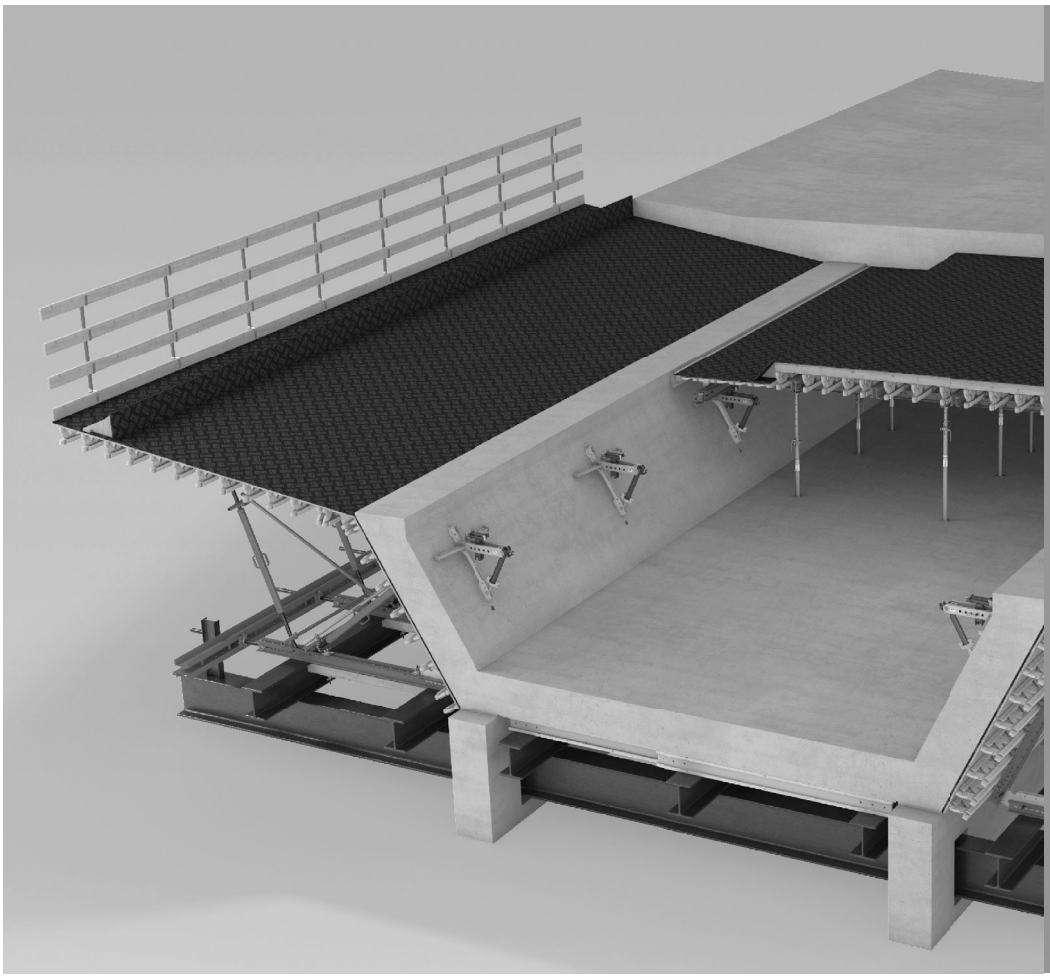


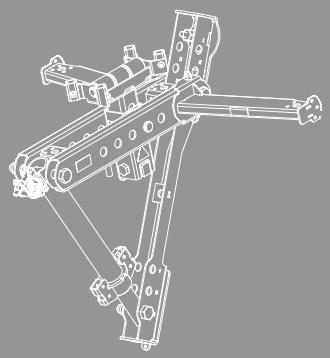


Edition 01.02.| 2019


VIL Incremental Launching Facility


Item no.	Weight kg		
132439	30.500	**Wall-Support VIL** For supporting Roller Drophead VIL and Rail Profile SRU.	**Note** Complete with: 1 Half-Coupling



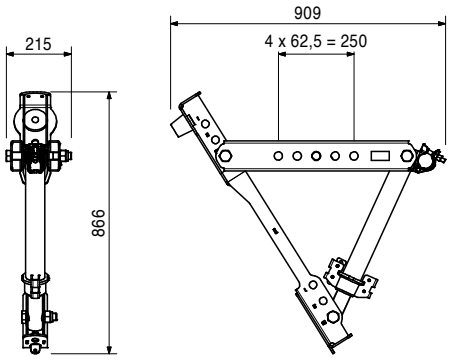



132436	10.200	**Roller Drophead VIL** Supporthead for Rail Profile SRU.







132517	5.400	**Cross Fall Compensator SRU** Adjustable coupling for corsswise connection of Steel Walers SRU.







132709	12.300	**Longitudinal Connector SRU, adjustable** Length-adjustable coupling for rigid connection of Steel Walers SRU.







Item no.	Weight kg	
132633	2.600	**Cross Swivel Head SRU** Articoulated prophead for the attachment to Steel Waler SRU with folding function across the waler.







132597	4.870	**Travelling Nose SRU** Ramp for Steel Walers SRU to compenbate cantilevers when moving VARIO Slab Formwork during the incremental launching process.







132386	0.120	**Anchor Positioning Plate DW 15** For fixing the DW 15 Anchor System if the plywood is drilled through.	**Note** Delivery unit: 50 pieces






031636	0.063	**DK Cone DW 15/55** For waterproof, fire-resistant and soundproof anchor points with Tie Rod DW 15. Used with Spacer Tube rough 22.	**Note** Delivery unit 50 pieces.



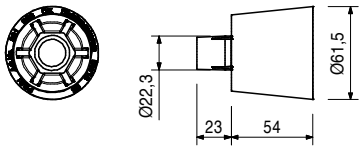



030070	0.222	**Hex. Nut DW 15 SW 30/50, galv.** For anchoring with Tie Rod DW 15 and B 15.	**Technical Data** Permissible load 90 kN.






Item no.	Weight kg	
065027	0.359	**Spacer Tube rough DR 22, l = 2.00 m** Plastic spacer tube for DW 15, B 15.





		Tie Rods DW 15
030030	1.440	**Tie Rod DW 15, spec. length**
030050	0.000	**Cutting Cost Tie Rod DW 15, B 15**


Note
Non-weldable! Take official Approval into consideration!
Technical Data
Permissible tension force 90 kN.






031150	0.831	**Waterstop Centrepiece DW 15, rough** For anchoring with Tie Rod DW 15 and B 15.


Technical Data
Permissible tension force 90 kN.




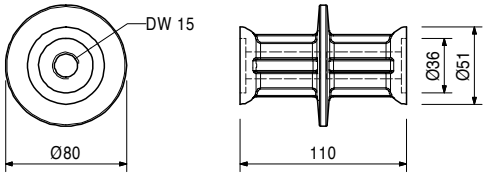


030840	0.515	**Threaded Anchor Plate DW 15** For use with Tie Rod DW 15 or B 15. For anchoring in concrete.


Note
Lost anchor part.






Item no.	Weight kg	
132387	0.000	**Fitting Pin Ø 26 x 160, galv.**



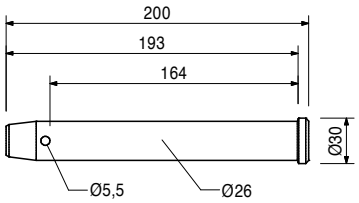



022230	0.033	**Cotter Pin 5/1, galv.**





104031	0.462	**Fitting Pin Ø 21 x 120** For different connections.





Accessories

018060	0.014	**Cotter Pin 4/1, galv.**


018060	0.014	**Cotter Pin 4/1, galv.**







VIL Incremental Launching Facility


Item no.	Weight kg		
101773	15.300	**Heavy Duty Spindle SLS 80/140** Used as adjustable spindle for truss beams made of Steel Walers SRU and Climbing Rails RCS.	**Note** Permissible load see PER Design Tables.







114997	7.160	**Bracing Shoe RCS DW 15** For anchoring the bracing with DW 15 to the building slab. Fixation with Anchor System M24 or corresponding dowels.	**Complete with** 1 pc. 104031 Fitting Pin Ø 21 x 120 1 pc. 018060 Cotter Pin 4/1, galv.



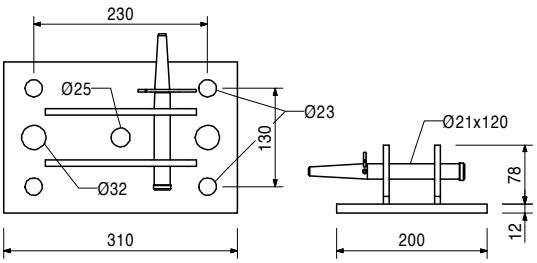



124777	0.210	**Anchor Bolt PERI 14/20 x 130** For temporary fixation to reinforced concrete structures.	**Note** See PERI Data Sheet! Drilling Ø 14 mm.





133941	2.810	**Bracing Wing VIL**



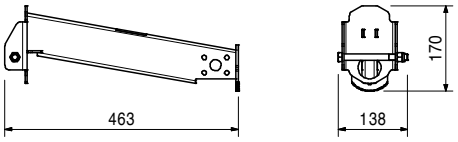

133933	9.930	**Overhang Adaptor VIL**

