Climbing System
SCS Double-Sided

Product Catalogue


Ausgabe 06.11/2018


Item no.	Weight kg
118737	140.000

Crossbeam Unit SCS 250
Platform Beam for climbing brackets with Adjusting Unit SCS and Carriage SCS to work in front of the formwork.

Complete with
1 pc. 118690 Carriage SCS
1 pc. 118575 Adjusting Unit SCS
2 pc. 104477 Bolt ISO 4014 M20 x 120-8.8, galv.
2 pc. 781053 Nut ISO 7040 M20-8, galv.
1 pc. 123692 Pin Ø 25 x 200 SCS
1 pc. 022230 Cotter Pin 5/1, galv.

Note
Wrench Size Carriage SW 19,
Height Adjusting Unit SW 30.

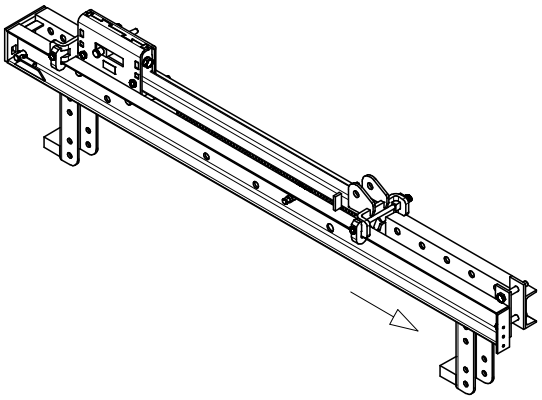

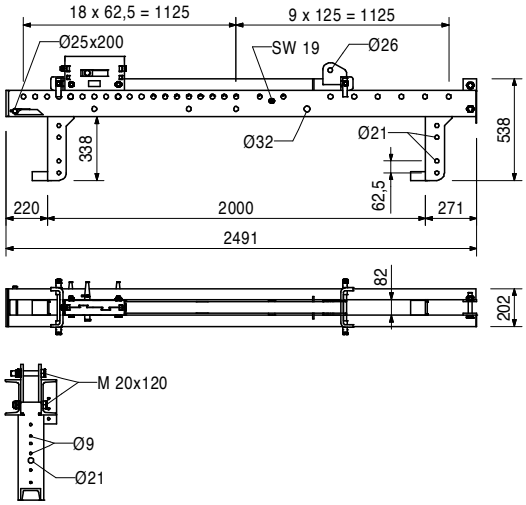


Accessories


118710	45.800	**Vertical Strut SCS 237**
118714	41.000	**Diagonal Strut SCS 257**
118579	6.280	**Guardrail Post SCS 150**

Item no.	Weight kg
118730	96.700

Crossbeam Unit SCS 190
Platform Beam for climbing brackets with Adjusting Unit SCS to prevent tipping of the formwork.

Complete with
1 pc. 118575 Adjusting Unit SCS
2 pc. 104477 Bolt ISO 4014 M20 x 120-8.8, galv.
2 pc. 781053 Nut ISO 7040 M20-8, galv.
1 pc. 123692 Pin Ø 25 x 200 SCS
1 pc. 022230 Cotter Pin 5/1, galv.
Note
Wrench Size Height Adjusting Unit SW 30.

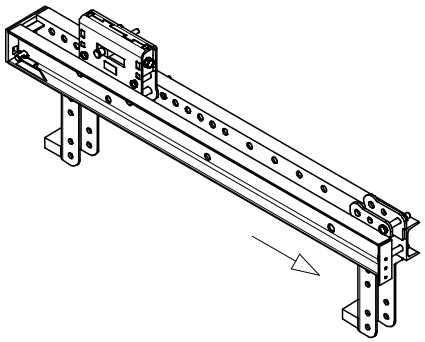

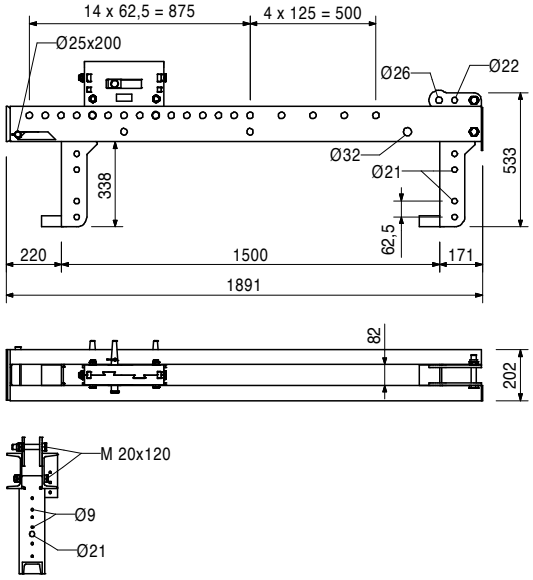

Accessories


118710	45.800
118714	41.000
118579	6.280


Vertical Strut SCS 237
Diagonal Strut SCS 257
Guardrail Post SCS 150

118710	45.800

Vertical Strut SCS 237
Vertical tension strut of the climbing bracket for support heights of 2.58 m and 2.40 m.

Complete with
4 pc. 711078 Bolt ISO 4014 M20 x 130-8.8, galv.
4 pc. 781053 Nut ISO 7040 M20-8, galv.




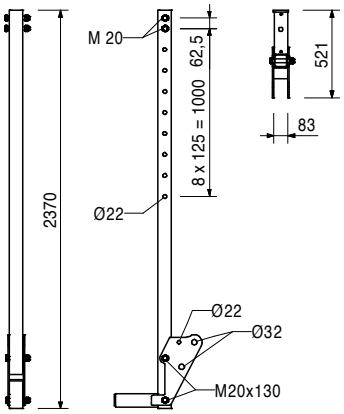


Item no.	Weight kg
118714	41.000

Diagonal Strut SCS 257
Diagonal compression strut of the climbing bracket.

Complete with
2 pc. 017040 Screw-On Coupler AK 48, galv.
2 pc. 125999 Hex Bolt M30 x 140-8.8, galv.
2 pc. 725119 Nut ISO 7042 M30-8, galv.




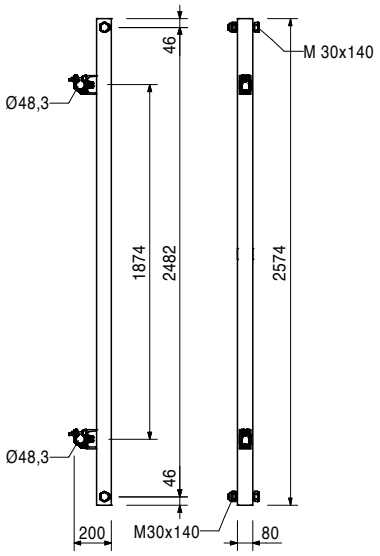

118579	6.280

Guardrail Post SCS 150
Guardrail post to connect handrail boards and toeboards.



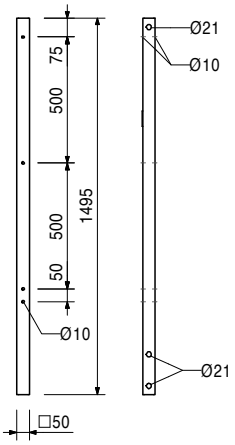

Accessories


113762	0.884
051160	1.050


Guardrail Conn. Plate ACS/SCS
Guardrail Connector CB

131279	19.700


Angle Adapter SCS
For parallel bracket arrangement in circular structures. For single- and double-sided application.


Complete with
1 pc. 131252 Steckbolzen 25 x 200 besch. SCS





Item no.	Weight kg	
129747	11.800	**Pressure Point Pivoted SCS** For supporting round structures in combination with Angle Adapter SCS.






118584	112.000	**Strongback SCS 325** Strongback with Spindle Connector SCS to support the formwork.

Complete with
1 pc. 118580 Spindle Connector SCS Ø 26-21



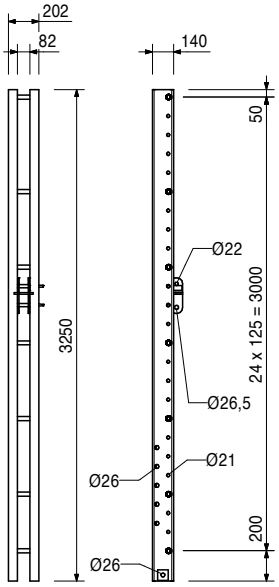



Accessories

051030	5.530	**Height Adjusting Unit CB, SCS**
110059	2.840	**Waler Fixation U100 – U120**


110022	0.491	**Spacer M20-82** Spacer for Climbing Rails RCS.


Complete with
1 pc. 104477 Bolt ISO 4014 M20 x 120-8.8, galv.
1 pc. 130341 Nut ISO 7042 M20-8, galv.







Item no.	Weight kg		
129689	6.960	**Height Adjusting Unit-2 CB/SCS/RCS** For height adjustment of RUNDFLEX Panels on the Strongbacks CB/RCS/SCS.	**Complete with** 1 pc. 715936 Pin Ø 25 x 180, incl. dowel pin Ø 6 1 pc. 018060 Cotter Pin 4/1, galv.



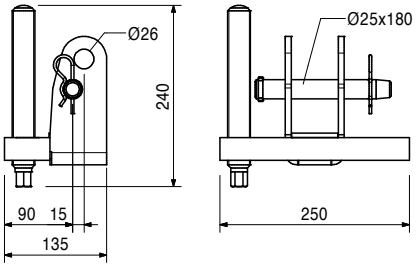



110059	2.840	**Waler Fixation U100 – U120** For fixing VARIO GT 24 Panels to Strongbacks CB, SCS and Steel Waler SRU.	**Complete with** 1 pc. 110055 Cross Clamp, galv. 1 pc. 118260 Spherical Nut RD 16, galv.



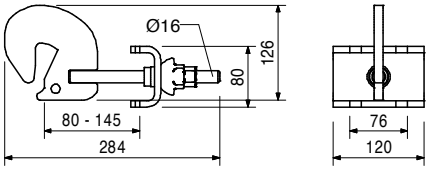


129720	8.040	**Waler Fixation-2 U100 – U120** For fixing VARIO GT 24 Panels to Strongbacks CB, SCS, Steel Waler SRU if anchoring is done through the strongback.	**Complete with** 2 pc. 118260 Spherical Nut RD 16, galv.



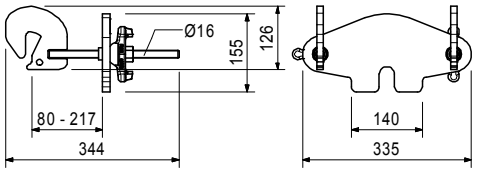

Item no.	Weight kg	
129674	178.000	**Strongback SCS 550** Strongback for supporting the formwork for double-sided application and formwork heights up to 6.00 m.




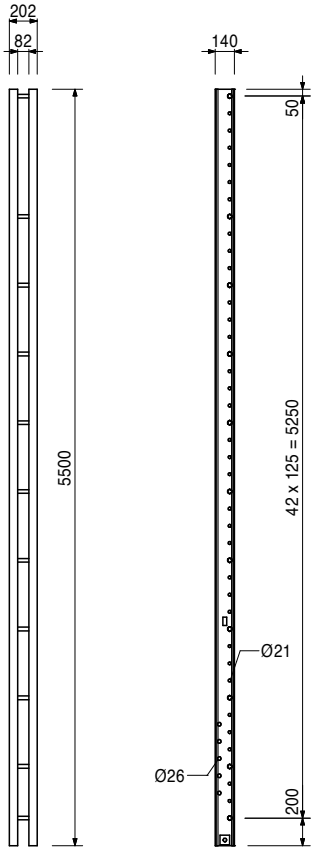


		Heavy Duty Spindles	**A**	**min. L**	**max. L**
111035	12.000	**Heavy Duty Spindle SLS 40/80**	344	400	800
101773	15.300	**Heavy Duty Spindle SLS 80/140**	746	800	1400
101774	18.300	**Heavy Duty Spindle SLS 100/180**	946	1000	1800
101776	24.900	**Heavy Duty Spindle SLS 140/240**	1346	1400	2400
101778	32.300	**Heavy Duty Spindle SLS 200/300**	1944	2000	3000
101779	38.500	**Heavy Duty Spindle SLS 260/360**	2544	2600	3600
109726	44.800	**Heavy Duty Spindle SLS 320/420**	3144	3200	4200
109785	51.000	**Heavy Duty Spindle SLS 380/480**	3744	3800	4800

Used as adjustable spindle for truss beams made of Steel Walers SRU and Climbing Rails RCS.

Note
Permissible load see PERI Design Tables.




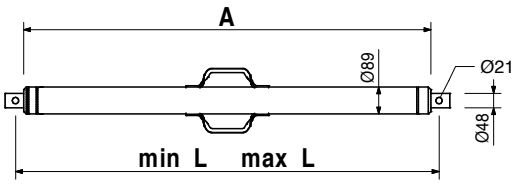


Accessories


104031	0.462	**Fitting Pin Ø 21 x 120**
018060	0.014	**Cotter Pin 4/1, galv.**
110477	3.990	**Spindle Adapter SLS/RCS**
129695	0.028	**Reducting Sleeve Ø 26 - 21, galv.**


Item no.	Weight kg	
129695	0.028	**Reducting Sleeve Ø 26 - 21, galv.** For reducing the hole diameter from Ø 26 to Ø 21 mm in fitting pin connections.





129772	25.600	**Platform Beam SCS 120** For use as finishing and concreting platform for double-sided application of SCS Climbing Bracket. **Complete with** 2 pc. 104031 Fitting Pin Ø 21 x 120 2 pc. 018060 Cotter Pin 4/1, galv.



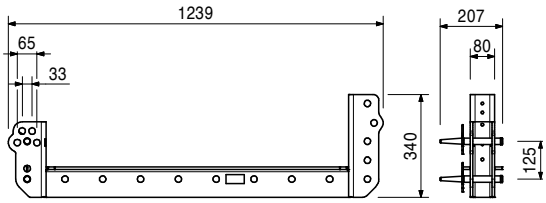



Accessories

118579	6.280	**Guardrail Post SCS 150**

Item no.	Weight kg	
129708	50.100	**Platform Post Double SCS 232** For mounting finishing platforms for double-sided application of SCS Climbing Bracket.

Complete with
2 pc. 104031 Fitting Pin Ø 21 x 120
2 pc. 018060 Cotter Pin 4/1, galv.
2 pc. 129704 Spacer M20-102
2 pc. 118578 Platform Post SCS 232



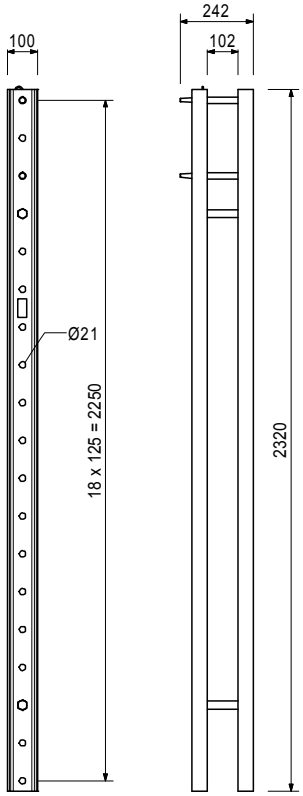



Accessories

129707	9.560	**Platform Post Connector SCS**
129772	25.600	**Platform Beam SCS 120**
129699	1.950	**Scaffold Tube Connector SCS 48**


129707	9.560	**Platform Post Connector SCS** For mounting and additional Platform Post Double SCS 232 for formwork heights > 3.90 m up to 6.00 m.


Complete with
2 pc. 104031 Fitting Pin Ø 21 x 120
2 pc. 018060 Cotter Pin 4/1, galv.
1 pc. 017040 Screw-On Coupler AK 48, galv.







129704	0.645	**Spacer M20-102** Spacer for Platform Post Double SCS 232.







Item no.	Weight kg		
129699	1.950	**Scaffold Tube Connector SCS 48** For stiffening Platform Post Double SCS 232 with Scaffold Tubes Ø 48.	**Complete with** 1 pc. 104031 Fitting Pin Ø 21 x 120 1 pc. 018060 Cotter Pin 4/1, galv.










129778	1.440	**Platform Post Stop SCS** Temporary stopper of finishing platform during moving in the first standard cycle.	**Complete with** 1 pc. 109612 Bolt ISO 4014 M24 x 130-8.8, galv. 1 pc. 105032 Nut ISO 7040 M24-8, galv.










127099	12.000	**Adapter Adjusting Unit SCS/RCS** Adapter for using a Climbing Rail RCS as Strongback with SCS Climbing System.	**Complete with** 2 pc. 111567 Fitting Pin Ø 26 x 120 2 pc. 104031 Fitting Pin Ø 21 x 120 4 pc. 018060 Cotter Pin 4/1, galv.









110477	3.990	**Spindle Adapter SLS/RCS** For connecting the Heavy-Duty Spindle SLS to the Climbing Rail RCS.	**Complete with** 1 pc. 104031 Fitting Pin Ø 21 x 120 1 pc. 018060 Cotter Pin 4/1, galv.








Accessories


104031	0.462	**Fitting Pin Ø 21 x 120**
018060	0.014	**Cotter Pin 4/1, galv.**
111567	0.729	**Fitting Pin Ø 26 x 120**
022230	0.033	**Cotter Pin 5/1, galv.**


Item no.	Weight kg	
127821	0.957	**Crane Eye CB 240-2 0.7 t** For assembly on the Climbing Bracket CB 240 when used as working scaffold. **Complete with** 1 pc. 128335 Bolt ISO 4015 M16 x 110 1 pc. 126248 Castle Nut M16 DIN 935-8, galv. 1 pc. 722825 Cotter Pin ISO 1234-04, 0 x 030 St **Note** Follow Instructions for Use! **Technical Data** Permissible load-bearing capacity 700 kg.





104031	0.462	**Fitting Pin Ø 21 x 120** For different connections.





Accessories


018060	0.014	**Cotter Pin 4/1, galv.**


018060	0.014	**Cotter Pin 4/1, galv.**





057417	4.080	**Supporting Roller ACS**




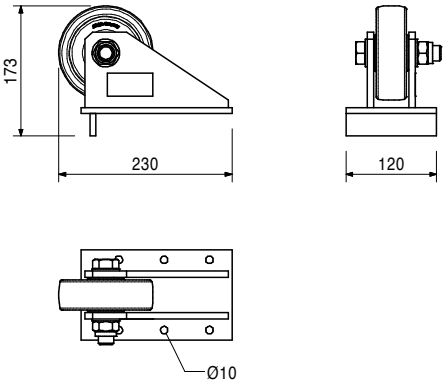


Accessories

024540	0.005	**TSS-Torx 6 x 40, galv.**

Item no.	Weight kg	
127633	38.700	**Formwork Waler 150 CB** Horizontal waler for connecting the spindle with the wall formwork.







Accessories

127659	3.980	**Clamp Adapter MX/TR-SRU**

127650	3.640	**Brace Connector CB** Connector for the connection of the spindle with the Formwork Waler 150 CB.


Complete with
1 pc. 104031 Fitting Pin Ø 21 x 120
2 pc. 018060 Cotter Pin 4/1, galv.
1 pc. 111147 Pin for CB 240 bracket






127659	3.980	**Clamp Adapter MX/TR-SRU** For the connection of Formwork Waler 150 CB to the formwork.

Complete with
1 pc. 105416 Bolt ISO 4014 M24 x 80-8.8, galv.
1 pc. 022250 Nut ISO 4032 M24-8, galv.






Accessories

127633	38.700	**Formwork Waler 150 CB**

115378	1.080	**Eye Nut RCS DW 15** As an articulated connection to the Climbing Rail RCS, Steel Waler SRU for bracing with DW 15.






Accessories


104031	0.462	**Fitting Pin Ø 21 x 120**
018060	0.014	**Cotter Pin 4/1, galv.**
111567	0.729	**Fitting Pin Ø 26 x 120**
022230	0.033	**Cotter Pin 5/1, galv.**


Item no.	Weight kg		
		Tie Rod DW 15	**Note**
030030	1.440	**Tie Rod DW 15, spec. length**	Non-weldable! Take official Approval into consideration!
030050	0.000	**Cutting Cost Tie Rod DW 15, B 15**	**Technical Data**
			Permissible tension force 90 kN.







			L
		Scaffold Tubes Steel	
026415	3.550	**Scaff. Tube Steel Ø 48.3 x 3.2, special length**	
026417	0.000	**Cutting Cost Scaffold Tube**	
026411	3.550	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 1.0 m**	1000
026412	7.100	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 2.0 m**	2000
125976	8.900	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 2.5 m**	2500
026413	10.650	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 3.0 m**	3000
114287	12.500	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 3.5 m**	3500
026414	14.200	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 4.0 m**	4000
026419	17.750	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 5.0 m**	5000
026418	21.600	**Scaff. Tube Steel Ø 48.3 x 3.2, l = 6.0 m**	6000







017010	1.400	**Swivel Coupling SW 48/48, galv.** For Scaffold Tubes Ø 48 mm.





Item no.	Weight kg	
113762	0.884	**Guardrail Conn. Plate ACS/SCS** For assembling Scaffold Tubes Ø 48 or Ø 60 as guardrail by means of Bail Pin A64 on Guardrail Posts ACS, SCS and GT 24. Fixation by Hex. Bolt M8, M12, M16 or Wood Screw Ø 8.







Accessories

110296	0.220	**Clamp A64 DIN 3570 M12, galv.**
710330	0.017	**Nut ISO 4032 M12-8, galv.**

051160	1.050	**Guardrail Connector CB** For assembling scaffold tubes on handrail posts.




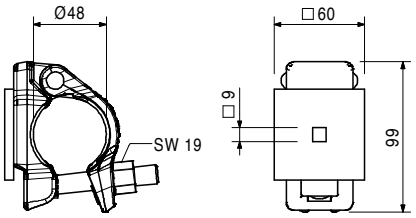


Accessories

126228	0.030	**F.H. Bolt DIN 603 M8 x 70 MU, galv.**

110296	0.220	**Clamp A64 DIN 3570 M12, galv.** For assembling Scaffold Tubes Ø 48 or Ø 60.	**Note** Wrench size SW 19.






Accessories

710330	0.017	**Nut ISO 4032 M12-8, galv.**

710330	0.017	**Nut ISO 4032 M12-8, galv.**






Item no.	Weight kg	
711071	0.004	**Nut ISO 7042 M8-8, galv.** Self-locking.




126088	4.390	**Guardrail Post Holder Multi** For fixing of an end guardrail post on Girders GT 24, VT 20 or Timbers 80/160. Fixing of the guardrail posts by means of Hex. Bolts M20 or Clamp A64.

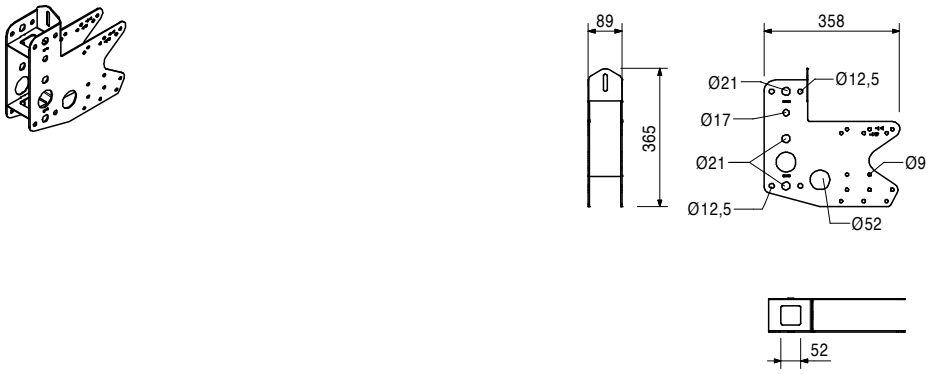

Accessories

710285	0.050	**Bolt ISO 4014 M8 x 100-8.8, galv.**
024090	0.005	**Nut ISO 4032 M8-8, galv.**
024470	0.008	**TSS-Torx 6 x 60, galv.**

114328	16.600	**Guardrail Post RCS/SRU 184** For assembly of the guardrail on the Platform Beam RCS/SRU or Angle Connector RCS/SRU. **Complete with** 2 pc. 114727 Bolt ISO 4017 M20 x 100-8.8, galv. 2 pc. 781053 Nut ISO 7040 M20-8, galv.

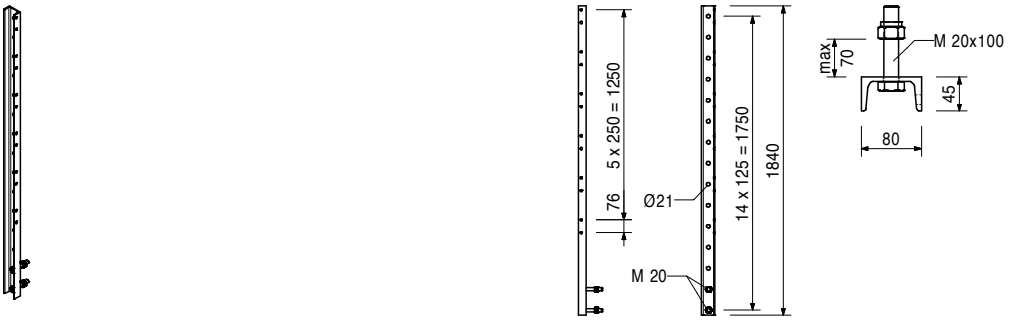


Accessories


110296	0.220	**Clamp A64 DIN 3570 M12, galv.**
710330	0.017	**Nut ISO 4032 M12-8, galv.**

Item no.	Weight kg
116477	10.600

Platform Beam Support RCS
Support for additional Platform Beams 2 x GT 24 or VT 20 when used with Cross Beam RCS 220. With connector for Guardrail Post RCS.


Complete with
1 pc. 109612 Bolt ISO 4014 M24 x 130-8.8, galv.
1 pc. 105032 Nut ISO 7040 M24-8, galv.




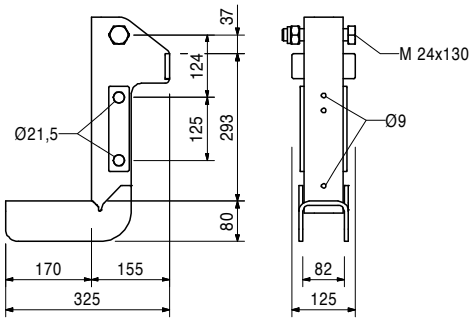

131701	45.800

Platform Beam Support SCS
Bearing for double arranged platform beams. For SCS 250 and SCS 190.







110330	0.865

Girder Fixation M20
For the fixation of 80 mm wide decking supports made of wood on Platform Beams with suitable boring of Ø 21 mm.

Complete with
1 pc. 706458 Bolt ISO 4017 M20 x 40-8.8, galv.
1 pc. 781053 Nut ISO 7040 M20-8, galv.






Accessories

024470	0.008

TSS-Torx 6 x 60, galv.

Item no.	Weight kg	
129722	0.746	**Cross Connector GT 24 / VT 20** For the connection of crossing GT 24 and VT 20 Formwork Girders.







Accessories

024540	0.005	**TSS-Torx 6 x 40, galv.**
024470	0.008	**TSS-Torx 6 x 60, galv.**

129724	0.817	**Cross Connector GT 24 / GT 24** For the connection of crossing GT 24 Formwork Girders.







Accessories

024540	0.005	**TSS-Torx 6 x 40, galv.**
024470	0.008	**TSS-Torx 6 x 60, galv.**

129817	0.675	**Cross Connector VT 20 / VT 20** For the connection of crossing VT 20 Formwork Girders.







Accessories

024540	0.005	**TSS-Torx 6 x 40, galv.**
024470	0.008	**TSS-Torx 6 x 60, galv.**

711084	0.420	**Bolt ISO 4014 M20 x 150-8.8, galv.**







Accessories


781053	0.065	**Nut ISO 7040 M20-8, galv.**


Item no.	Weight kg	
131404	1.080	**Screw-On Coupler-2 HT B Ø 48-M20, galv.** For Screwing Scaffold Tubes Ø 48 mm to components up to 9 mm thickness.






110289	4.260	**L-Angle RCS 120 x 120 x 200** For fixing end handrail posts on the decking.




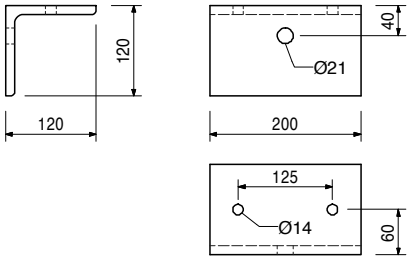

Accessories


017040	0.850	**Screw-On Coupler AK 48, galv.**
024270	0.023	**Lag Screw DIN 571 8 x 60, galv.**







		F. H. Bolts DIN 603	L	B
710295	0.028	**F.H. Bolt DIN 603 M8 x 45 MU, galv.**	45	22
024140	0.033	**F.H. Bolt DIN 603 M8 x 70 MU, galv.**	70	58
710240	0.050	**F.H. Bolt DIN 603 M8 x 100 MU, galv.**	100	80
024360	0.058	**F.H. Bolt DIN 603 M8 x 125 MU, galv.**	125	113





Item no.	Weight kg	
710285	0.050	**Bolt ISO 4014 M8 x 100-8.8, galv.**







780354	0.002	**Washer ISO 7089 200 HV, A 8, galv.**







710219	0.184	**Bolt ISO 4014 M16 x 100-8.8, galv.**





123478	0.255	**Toe Board Angle 90°** For diverse timber connections.







Accessories

024550	0.005	**Spax Screw TX 30 8 x 20, yellow galv.**
129711	0.010	**Spax Screw TX 25, 6 x 20, yellow galv.**

		TSS-Torxs, galv.	**L**
024540	0.005	**TSS-Torx 6 x 40, galv.**	40
024470	0.008	**TSS-Torx 6 x 60, galv.**	60
024690	0.008	**TSS-Torx 6 x 80, galv.**	80

For Torx Bits TX 30. Self-drilling.






Item no.	Weight kg	
781053	0.065	**Nut ISO 7040 M20-8, galv.** Self-locking.






070890	0.030	**Nut ISO 7040 M16-8, galv.** Self-locking.







029440	0.005	**Lag Screw DIN 571 6 x 20, galv.**





024260	0.027	**Lag Screw DIN 571 8 x 80, galv.**






108834	0.085	**F.H. Bolt DIN 603 M8 x 180 MU, galv.**


L	B
180	28







113349	0.087	**Washer ISO 7094 100 HV, A 16, galv.**







Item no.	Weight kg	
710312	0.005	**Nail 3 x 80**







024520	0.052	**Lag Screw DIN 571 8 x 160, galv.**







113347	0.013	**Washer ISO 7094 100 HV, A 8, galv.**






129729	1.430	**Mounting Ring SCS M24**




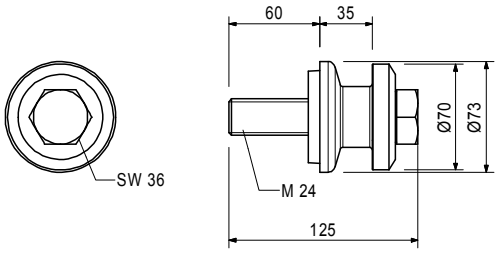

031220	1.010	**Climbing Cone-2 M24/DW 15, galv.** Anchor system M24. For anchoring climbing systems.

Note
Seperate design information on request.




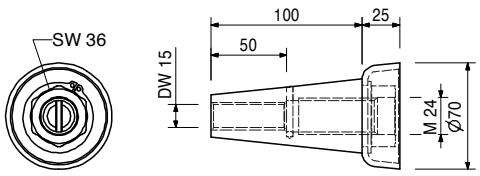

Accessories


030840	0.515	**Threaded Anchor Plate DW 15**
030030	1.440	**Tie Rod DW 15, spec. length**
030740	1.550	**Tie Rod B 15, spec. length**

Item no.	Weight kg		
		Tie Rod DW 15	**Note**
030030	1.440	**Tie Rod DW 15, spec. length**	Non-weldable! Take official Approval into consideration!
030050	0.000	**Cutting Cost Tie Rod DW 15, B 15**	**Technical Data**
			Permissible tension force 90 kN.







		Tie Rod B 15	**Note**
030740	1.550	**Tie Rod B 15, spec. length**	Weldable! Take official Approval into consideration!
030050	0.000	**Cutting Cost Tie Rod DW 15, B 15**	**Technical Data**
			Permissible tension force 82 kN.







030840	0.515	**Threaded Anchor Plate DW 15**	**Note**
		For use with Tie Rod DW 15 or B 15. For anchoring in concrete.	Lost anchor part.





114158	1.030	**Screw-On Cone-2 M24/DW 20, galv.**	**Note**
		Anchor system M24. For anchoring climbing systems.	Separate design information on request.




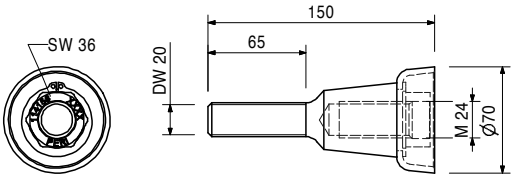


Accessories


030860	0.792	**Threaded Anchor Plate DW 20**


Item no.	Weight kg		
030860	0.792	**Threaded Anchor Plate DW 20** For use with Tie Rod DW 20, B 20 or Screw-On Cone-2 M24/DW 20. For anchoring in concrete.	**Note** Lost anchor part.



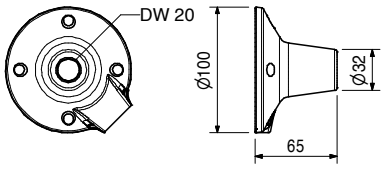

029270	0.331	**Advancing Bolt M24, galv.** For fixing the M24 anchor system if the plywood formlining is drilled through.







Accessories

029280	0.196	**Anchor Positioning Plate M24, galv.**

029280	0.196	**Anchor Positioning Plate M24, galv.** For fixing the M24 anchor system if the plywood formlining is drilled through.






Accessories

029440	0.005	**Lag Screw DIN 571 6 x 20, galv.**

026420	0.123	**Anchor Positioning Stud M24, galv.** For fixing the M24 anchor system if the plywood formlining is not drilled through.	**Note** Allen Key SW 14.







Accessories

027212	0.445	**Allen Key SW 14, long**
710312	0.005	**Nail 3 x 80**

Item no.	Weight kg		
031652	0.247	**KK Concrete Cone M24-67/52** For closing anchor points with Climbing Cone-2, M24/DW 15 and Screw-On Cone-2 M24/DW 20.	**Note** Delivery unit 50 pieces.







Accessories


131709	9.980	**Sealing Compound-3, 6 cans-set**

131709	9.980	**Sealing Compound-3, 6 cans-set** For bonding PERI Concrete Cones.	**Note** See Safety Data sheet! Consisting of: 6 x Component A, 6 x Component B





065027	0.359	**Spacer Tube rough DR 22, l = 2.00 m** Plastic spacer tube for DW 15, B 15.





118582	1.850	**Mounting Ring SCS M30** For anchoring of the SCS Bracket at high vertical loads.




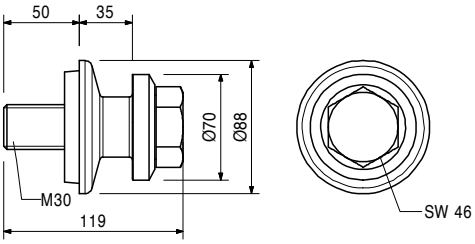


Accessories

030920	1.650	**Climbing Cone-2 M30/DW 20, galv.**

Item no.	Weight kg		
030920	1.650	**Climbing Cone-2 M30/DW 20, galv.** Anchor System M30. For anchoring climbing systems.	**Note** Separate Design Information on request.




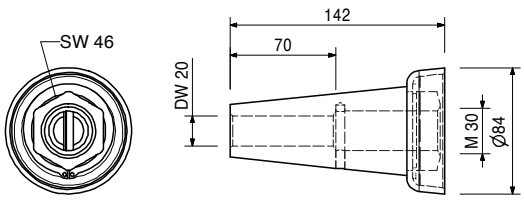

Accessories


030860	0.792	**Threaded Anchor Plate DW 20**
030700	2.560	**Tie Rod DW 20, spec. length**
030745	2.600	**Tie Rod B 20, spec. length**

		Tie Rod DW 20	**Note** Non-weldable! Take official Approval into consideration! **Technical Data** Permissible tension force 150 kN.
030700	2.560	**Tie Rod DW 20, spec. length**	
030800	0.000	**Cutting Cost Tie Rod DW 20/B 20**	







		Tie Rod B 20	**Note** Weldable! Take official Approval into consideration! **Technical Data** Permissible tension force 150 kN.
030745	2.600	**Tie Rod B 20, spec. length**	
030800	0.000	**Cutting Cost Tie Rod DW 20/B 20**	







030860	0.792	**Threaded Anchor Plate DW 20** For use with Tie Rod DW 20, B 20 or Screw-On Cone-2 M24/DW 20. For anchoring in concrete.	**Note** Lost anchor part.



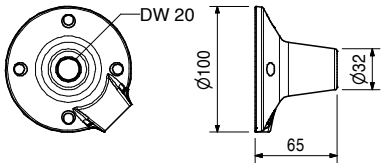

Item no.	Weight kg		
031653	0.364	**KK Concrete Cone M30-80/52** For closing anchor points with Climbing Cone-2 M30/DW 20 or Screw-On Cone M30/DW 26.	**Note** Delivery unit 50 pieces.







Accessories

131709	9.980	**Sealing Compound-3, 6 cans-set**

029450	0.339	**Advancing Screw M30, galv.** For fixing the M30 Anchor System if the plywood formlining is drilled through.







Accessories

029380	0.200	**Anchor Positioning Plate M30, galv.**

029380	0.200	**Anchor Positioning Plate M30, galv.** For fixing the M30 Anchor System if the plywood formlining is drilled through.






Accessories

029440	0.005	**Lag Screw DIN 571 6 x 20, galv.**

026450	0.214	**Anchor Positioning Stud M30, galv.** For fixing the M30 Anchor System if the plywood formlining is not drilled through.







Accessories

027212	0.445	**Allen Key SW 14, long**
710312	0.005	**Nail 3 x 80**

Item no.	Weight kg	
118769	1.880	**Mounting Bolt SCS M36** For anchoring of the SCS Bracket at high tension forces.




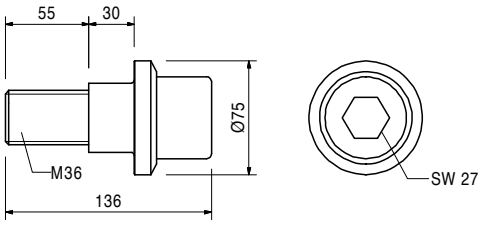


Accessories

030940	3.040	**Climbing Cone-2 M36/DW 26, galv.**

118772	2.550	**Mounting Ring SCS M36** For anchoring of the SCS Bracket at high tension forces and vertical loads.



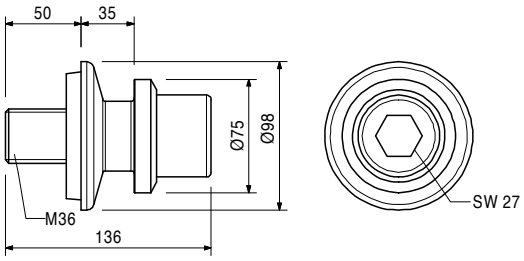



Accessories

030940	3.040	**Climbing Cone-2 M36/DW 26, galv.**

030940	3.040	**Climbing Cone-2 M36/DW 26, galv.** Tie System M36. For anchoring of climbing systems.

Note
Separate design information on request.



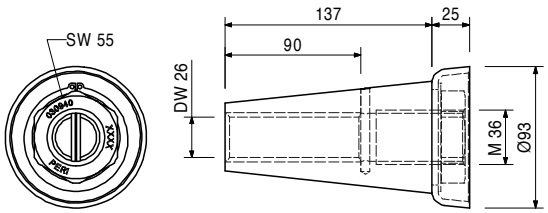



Accessories

030870	1.260	**Threaded Anchor Plate DW 26**
030340	4.480	**Tie Rod DW 26, spec. length**


		Tie Rod DW 26
030340	4.480	**Tie Rod DW 26, spec. length**
030500	0.000	**Cutting Cost Tie Rod DW 26**


Note
Non-weldable! Take official approval into consideration!
Technical Data
Permissible tension force 250 kN.







Item no.	Weight kg		
030870	1.260	**Threaded Anchor Plate DW 26** For use with Tie Rod DW 26 or Screw-On Cone M36/DW 26. For anchoring in concrete.	**Note** Lost anchor part.



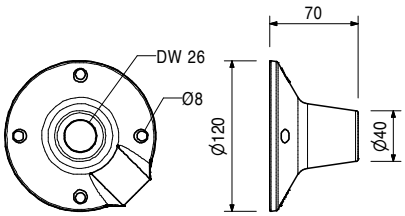

031654	0.512	**KK Concrete Cone M36-90/52** For closing anchor points with Climbing Cone-2 M36/DW 26.	**Note** Delivery unit 50 pieces.







Accessories

131709	9.980	**Sealing Compound-3, 6 cans-set**

029390	0.170	**Anchor Positioning Plate M36, galv.** For fixing the M36 anchor system if the plywood formlining is drilled through.







Accessories

029440	0.005	**Lag Screw DIN 571 6 x 20, galv.**


029430	0.930	**Bolt ISO 4017 M36 x 70-8.8, galv.** Bolt for anchoring of climbing systems and as advancing bolt.





Item no.	Weight kg	
026460	0.308	**Anchor Positioning Stud M36, galv.** For fixing the M36 anchor system if the plywood formlining is not drilled through.







Accessories

027212	0.445	**Allen Key SW 14, long**
710312	0.005	**Nail 3 x 80**

123819	9.610	**Bracing Shoe SCS M30/DW20** Used as compression point at starter sections with optional connections to Scaffold Tube Bracing Ø 48, Vertical Tie Rod DW 20 Suspension, Climbing Anchor M36, Diagonal Strut SCS or Heavy Duty Spindle SCS. **Complete with** 1 pc. 017040 Screw-On Coupler AK 48, galv.




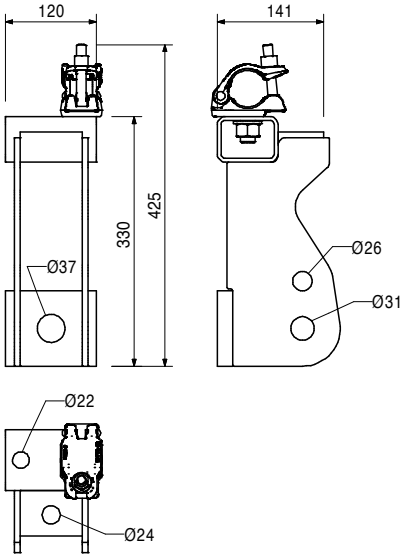


Accessories

029420	0.590	**Bolt ISO 4017 M30 x 70-8.8, galv.**
029430	0.930	**Bolt ISO 4017 M36 x 70-8.8, galv.**


030580	0.371	**Hex. Nut DW 20 SW 36/60, weldable** For anchoring with Tie Rod DW 20 and B 20. **Note** Weldable! **Technical Data** Permissible load 150 kN.






Item no.	Weight kg	
114082	2.860	**Counterplate RCS DW 20** Counterplate with centring for anchoring through the Climbing Rail RCS.







030990	0.786	**Wingnut DW 20, galv.** For anchoring with Tie Rod DW 20 and B 20. **Technical Data** Permissible load 150 kN.



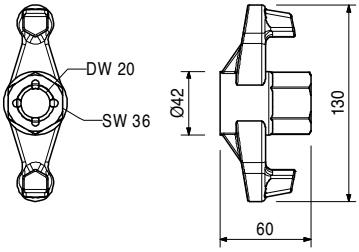



051250	2.790	**Tension Belt, l = 5.70 m, 2.5 t** To prevent climbing systems from tipping over due to wind loads. **Note** Follow Instructions for Assembly and Use! **Technical Data** Permissible tension force 2.5 t.

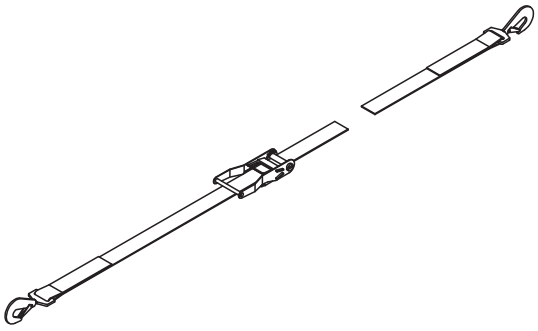



110469	1.660	**Tension Belt Connector Wall M36** To connect Tension Belt to the previous anchor M30 or M36.







Accessories

029420	0.590	**Bolt ISO 4017 M30 x 70-8.8, galv.**
029430	0.930	**Bolt ISO 4017 M36 x 70-8.8, galv.**

Item no.	Weight kg	
129693	3.130	**Tension Anchor Connector CB/SCS** For connecting the wind suspension with Tie Rod DW 15 to the Crossbeam Unit SCS 250 / 190 or CB Climbing Bracket.







Accessories

711084	0.420	**Bolt ISO 4014 M20 x 150-8.8, galv.**
781053	0.065	**Nut ISO 7040 M20-8, galv.**

107008	4.100	**Wall Tension Anchor** Alternative wall connector to prevent tipping over due to wind loads with Tie Rod DW 15. Including Turnbuckle CB M20/DW 15.

Complete with
1 pc. 027170 Pin Ø 16 x 42, galv.
1 pc. 018060 Cotter Pin 4/1, galv.




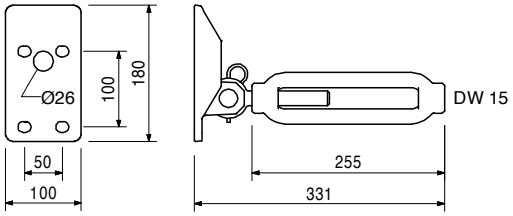


Accessories


026430	0.334	**Bolt ISO 4014 M24 x 70-10.9, glav.**


026430	0.334	**Bolt ISO 4014 M24 x 70-10.9, glav.** High-strength bolt for anchoring climbing systems.







116532	1.890	**Tie Yoke VARIOKIT Ø 22 / DW 15** For assembling in Steel Waler SRU.





Item no.	Weight kg	
115375	6.100	**Articulated Spanner RCS DW 15** For tensioning and as an articulated connection to the Climbing Rail RCS, Steel Waler SRU or Bracing Shoe RCS for bracing with DW 15.




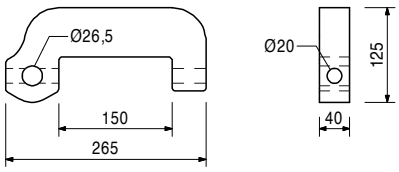


Accessories


104031	0.462	**Fitting Pin Ø 21 x 120**
018060	0.014	**Cotter Pin 4/1, galv.**
111567	0.729	**Fitting Pin Ø 26 x 120**
022230	0.033	**Cotter Pin 5/1, galv.**
030070	0.222	**Hex. Nut DW 15 SW 30/50, galv.**
030030	1.440	**Tie Rod DW 15, spec. length**


116807	1.820	**Turnbuckle CB M20/DW 15** For tensioning of Tie Rod DW 15 to prevent tipping over due to wind loads. Connects Tie Rod DW 15 with Wall Bracing Shoe CB M24.	**Complete with** 1 pc. 711059 Turnbuckle for tension anchor CB 1 pc. 711060 Eye Bolt M20, left, galv.





051270	1.620	**Tension Belt Connector Wall M24** Wall connector to prevent tipping over due to wind loads with Tension Belt. To be used for climbing systems CB and FB.







Accessories

026430	0.334	**Bolt ISO 4014 M24 x 70-10.9, glav.**


030090	0.402	**Hex. Nut DW 15 SW 30/108, galv.** For coupling Tie Rod DW 15 and B 15.	**Technical Data** Permissible load 90 kN.







Item no.	Weight kg		
030070	0.222	**Hex. Nut DW 15 SW 30/50, galv.** For anchoring with Tie Rod DW 15 and B 15.	**Technical Data** Permissible load 90 kN.





129831	2.740	**Bracing Shoe SCS M30/M24** To connect wind suspension to the previous anchor.	**Complete with** 1 pc. 104031 Fitting Pin Ø 21 x 120 1 pc. 018060 Cotter Pin 4/1, galv.




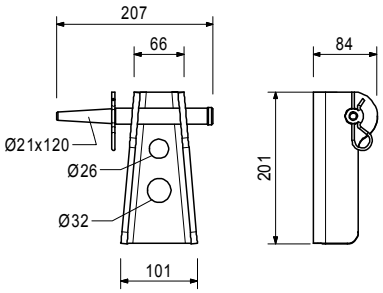


Accessories

123843	0.623	**Bolt ISO 4017 M30 x 80-10.9**
026430	0.334	**Bolt ISO 4014 M24 x 70-10.9, glav.**


123843	0.623	**Bolt ISO 4017 M30 x 80-10.9**







030100	0.439	**Wingnut DW 15, galv.** For anchoring with Tie Rod DW 15 and B 15.	**Technical Data** Permissible load 90 kN.







Item no.	Weight kg		
030370	1.660	**Wingnut Pivot Plate DW 15, galv.** For anchoring with Tie Rod DW 15 and B 15. With pivoting captive nut. Maximum angle of tilting 8°.	**Note** Wrench size SW 27. **Technical Data** Permissible load 90 kN.



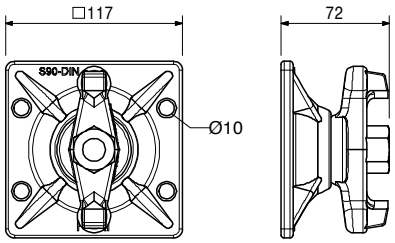



030110	0.799	**Wingnut Counterplate DW 15, galv.** For anchoring with Tie Rod DW 15 and B 15.	**Technical Data** Permissible load 90 kN.



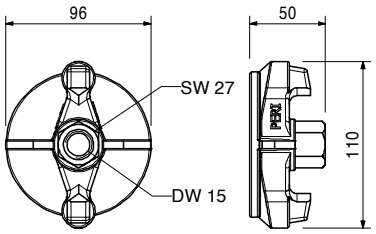



072180	0.560	**Ratchet Wrench 1/2"**







029610	5.300	**Ratchet Wrench 1"**



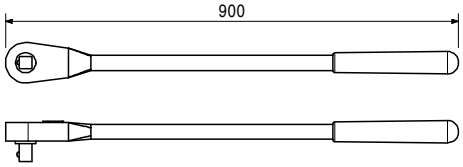


123751	0.216	**Socket SW 19-1/2“ L** Fits to Hex. Bolts M12. To operate the Carriage SCS with Drive Shaft SW 19.	






SCS Double-Sided


Item no.	Weight kg	
104823	0.175	**Socket SW 30-1/2"** Fits to Hex. Bolts M20. To operate the Adjusting Unit SCS.







029630	0.580	**Socket SW 46-1"** Fits to Hex. Bolts M30.







029640	1.000	**Socket SW 55-1"** Fits to Hex. Bolts M36.







123750	0.776	**Hexagon Socket SW 27-1“** Fits to Cyl. Bolts ISO 4762 M36.





027212	0.445	**Allen Key SW 14, long** Fits to PERI Anchor Positioning Studs and Allen Key Bolts M16.







Item no.	Weight kg
118575	16.800

Adjusting Unit SCS
Spare part for Crossbeam Unit SCS.

Complete with
3 pc. 111567 Fitting Pin Ø 26 x 120
3 pc. 022230 Cotter Pin 5/1, galv.
2 pc. 710219 Bolt ISO 4014 M16 x 100-8.8, galv.
2 pc. 070890 Nut ISO 7040 M16-8, galv.




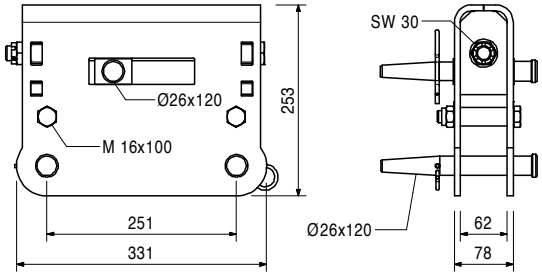


118580	5.500

Spindle Connector SCS Ø 26-21
Spare part for Strongback SCS.

Complete with
2 pc. 104031 Fitting Pin Ø 21 x 120
2 pc. 018060 Cotter Pin 4/1, galv.




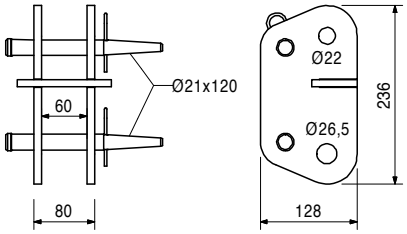


118690	23.500


Carriage SCS
Spare part for Crossbeam Unit SCS 250.


Complete with
2 pc. 103740 Bolt ISO 4016 M16 x 280-4.6 MU, galv.
2 pc. 070890 Nut ISO 7040 M16-8, galv.

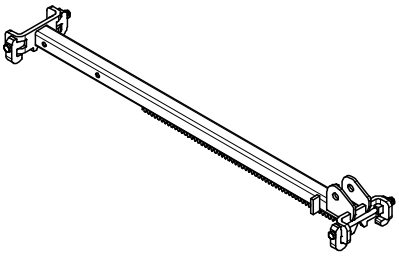

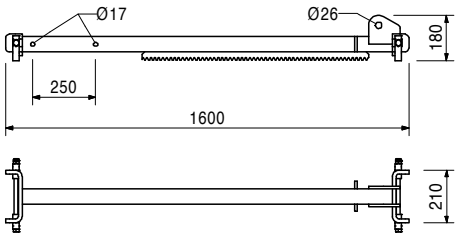

Item no.	Weight kg		
126431	12.300	**Hatch 55 x 60-2, foldable** Self-closing hatch for ladder access. Clear opening approx. 55 x 60 cm. Ladder fixation with bolts or by hanging up.	**Complete with** 1 pc. 126785 Hatch Hinge RCS 12 pc. 108647 Rivet DIN 7337- A5 x 20 2 pc. 022230 Cotter Pin 5/1, galv.




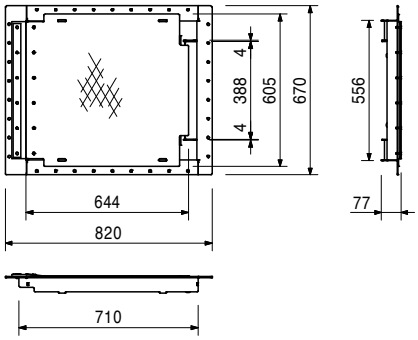


Accessories

710224	0.047	**Bolt ISO 4017 M12 x 40-8.8, galv.**
710381	0.017	**Nut ISO 7042 M12-8, galv.**

110608	15.600	**Hatch 55 x 60, foldable** Self-closing hatch for ladder access. Clear opening approx. 55 x 60 cm. Ladder fixation with bolts.	**Complete with** 1 pc. 110529 Hinging Plate left, galv. 1 pc. 110535 Hinging Plate right, galv. 8 pc. 721412 Rivet DIN 7337 - A4,8 x 12




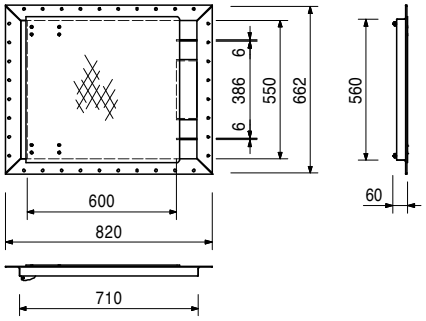


Accessories


710224	0.047	**Bolt ISO 4017 M12 x 40-8.8, galv.**
710381	0.017	**Nut ISO 7042 M12-8, galv.**


051430	37.900	**Sliding Hatch Cover** Non self-closing hatch for ladder access. Clear opening approx. 73 x 55 cm. Ladder fixation with bolts.	**Complete with** 4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 4 pc. 710381 Nut ISO 7042 M12-8, galv.

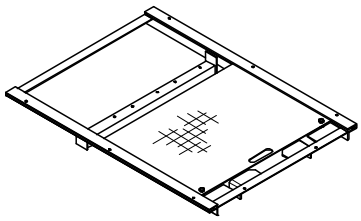

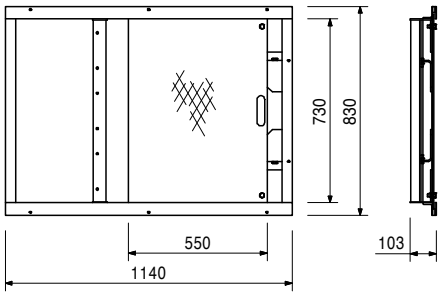



Item no.	Weight kg		
051410	11.700	**Ladder 180/6, galv.** As access for PERI Formwork Systems.	**Complete with** 4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv. 4 pc. 710381 Nut ISO 7042 M12-8, galv.

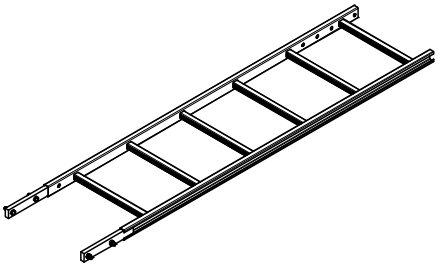

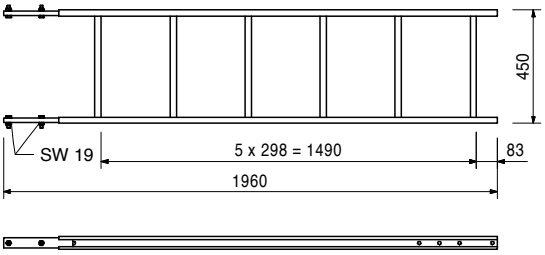



051420	12.800	**Ladder 220/6, galv.** As access for PERI Formwork Systems.	**Complete with** 4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv. 4 pc. 710381 Nut ISO 7042 M12-8, galv.

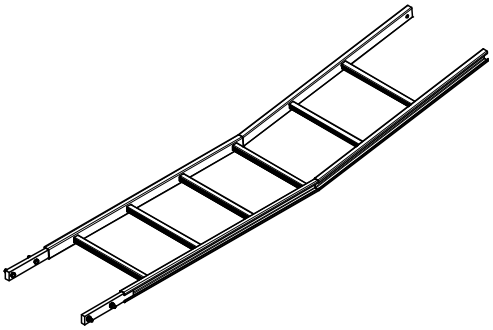

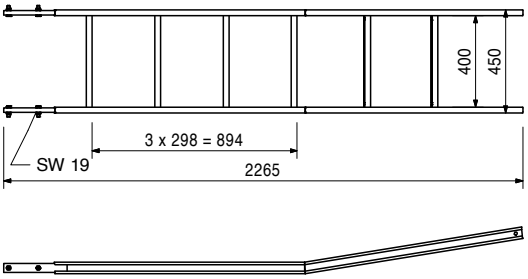



103724	10.400	**End Ladder 180/2, galv.** As access for PERI Formwork Systems.	**Complete with** 4 pc. 710224 Bolt ISO 4017 M12 x 40-8.8, galv. 4 pc. 710381 Nut ISO 7042 M12-8, galv.

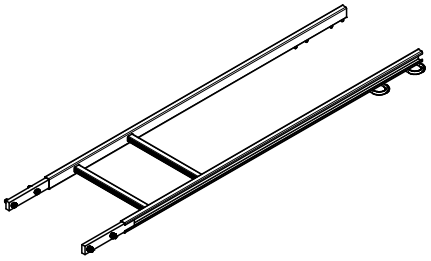

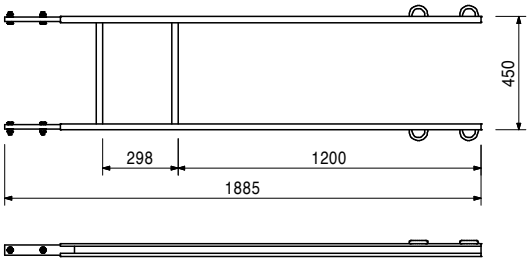



109105	5.070	**Ladder Base 30 adjustable, galv.** For horizontal fixing of ladders on the platform decking.



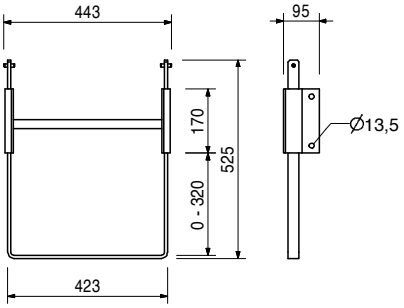


Item no.	Weight kg	
051460	2.180	**Ladder Base, galv.** As bottom ladder connection and for securing ladders against sliding on the scaffold decks.







103718	0.684	**Ladder Hook, galv.** For adjusting the bottom ladder. Always use in pairs.	**Complete with** 2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 2 pc. 710381 Nut ISO 7042 M12-8, galv.







		Ladder Safety Cages, galv.	**Complete with**
104132	15.600	**Ladder Safety Cage 75, galv.**	4 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv.
051450	25.200	**Ladder Safety Cage 150, galv.**	4 pc. 701763 Clamping Plate Fl 25 x 10 x 90
		Ladder safety cage for PERI Access Ladders.	



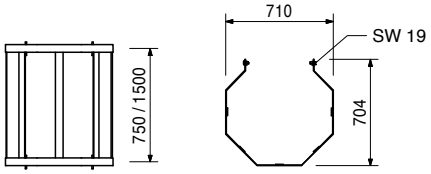



111165	6.080	**Ladder Connector VARIO, adjustable** For connecting ladders to Steel Walers SRZ and SRU, Profile U100 – U120.	**Complete with** 2 pc. 710266 Bolt ISO 4017 M12 x 25-8.8, galv. 2 pc. 701763 Clamping Plate Fl 25 x 10 x 90



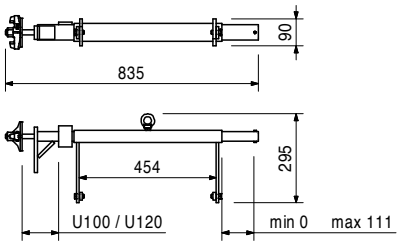



Item no.	Weight kg	
129805	8.600	**Ladder Connector VARIO/SCS** For connecting ladders to Steel Walers SRZ and SRU (U100 - U120) when using Platform Beam SCS 120.

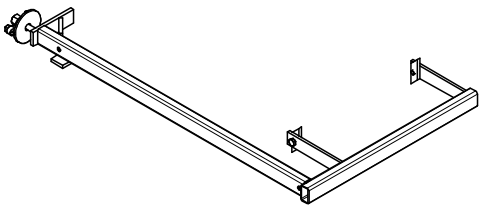

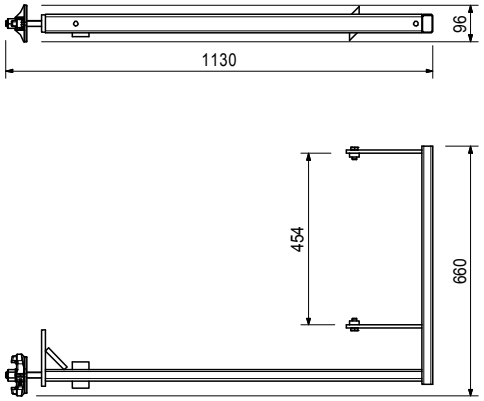


Item no.	Weight kg		L
710224	0.047	**Bolt ISO 4017 M12 x 40-8.8, galv.** As access for PERI formwork systems.	40







Item no.	Weight kg	
710381	0.017	**Nut ISO 7042 M12-8, galv.** Self-locking.





Item no.	Weight kg	Girders GT 24	L
075100	5.300	**Girder GT 24, l = 0.90 m**	918
075120	7.100	**Girder GT 24, l = 1.20 m**	1214
075150	8.900	**Girder GT 24, l = 1.50 m**	1510
075180	10.600	**Girder GT 24, l = 1.80 m**	1806
075210	12.400	**Girder GT 24, l = 2.10 m**	2102
075240	14.200	**Girder GT 24, l = 2.40 m**	2398
075270	15.900	**Girder GT 24, l = 2.70 m**	2694
075300	17.700	**Girder GT 24, l = 3.00 m**	2990
075330	19.500	**Girder GT 24, l = 3.30 m**	3286
075360	21.200	**Girder GT 24, l = 3.60 m**	3582
075390	23.000	**Girder GT 24, l = 3.90 m**	3878
075420	24.800	**Girder GT 24, l = 4.20 m**	4174
075450	26.600	**Girder GT 24, l = 4.50 m**	4470
075480	28.300	**Girder GT 24, l = 4.80 m**	4766
075510	30.100	**Girder GT 24, l = 5.10 m**	5062
075540	31.900	**Girder GT 24, l = 5.40 m**	5358
075570	33.600	**Girder GT 24, l = 5.70 m**	5654
075600	35.400	**Girder GT 24, l = 6.00 m**	5950

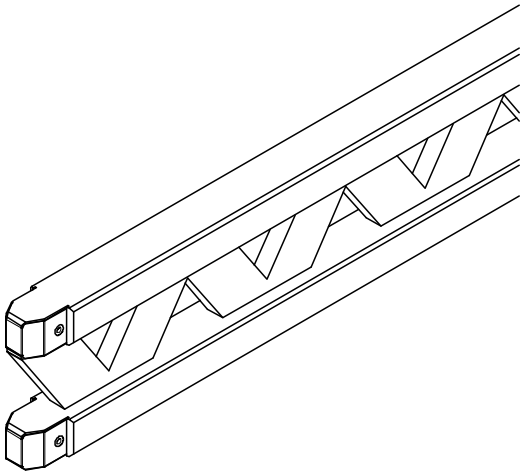

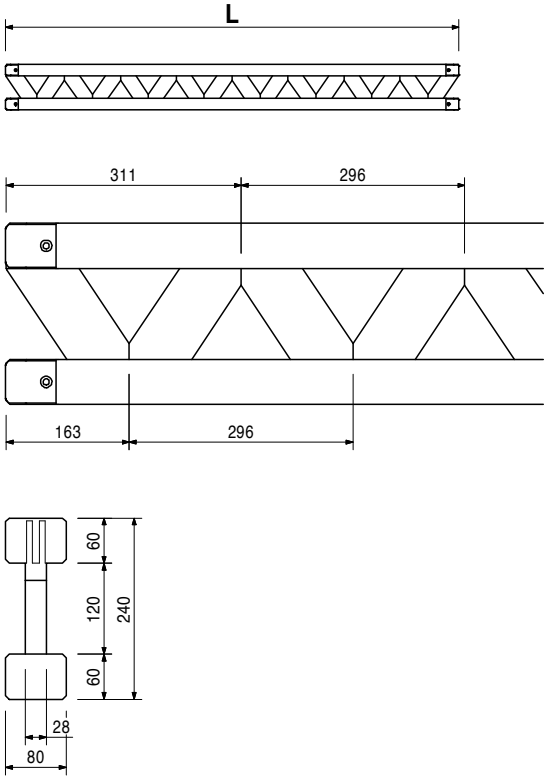

078010	36.875	**Girder GT 24, l = 6.25 m**

Item no.	Weight kg	Girders VT 20K	L
074990	8.600	**Girder VT 20K, l = 1.45 m**	1447
074905	12.700	**Girder VT 20K, l = 2.15 m**	2152
074910	14.500	**Girder VT 20K, l = 2.45 m**	2452
074890	15.600	**Girder VT 20K, l = 2.65 m**	2652
074920	17.100	**Girder VT 20K, l = 2.90 m**	2902
074930	19.500	**Girder VT 20K, l = 3.30 m**	3292
074940	21.200	**Girder VT 20K, l = 3.60 m**	3592
074950	23.000	**Girder VT 20K, l = 3.90 m**	3892
074960	26.700	**Girder VT 20K, l = 4.50 m**	4492
074970	29.900	**Girder VT 20K, l = 4.90 m**	4902
074980	34.800	**Girder VT 20K, l = 5.90 m**	5902

Universal formwork girder made of wood.

Note

The girder fulfils all requirements of DIN EN 13377 class P20 (Declaration of Conformity).

